

SLIM SURFACE MOUNT LED EXIT 24M


The SP-2003 is designed as a slim surface mount emergency exit light allowing 3hours minimum lighting after power cut.

4pcs PVC stickers are included.


Usage: widely used in modern hotels,shops and other public places,security evacuation and guide.



Item code	SP-2003BK
Input Voltage	220-240AC
Frequency	50/60Hz
Battery	4.8V 800mAh NI-MH
Charge time	16hours
Discharge time	2 hours
Operating Temp	0°C~40°C
Side	Single/double
IP Grade	IP20
Material of the Lamp	Flame retardant (V-0)
Size of the Lamp	show as below
PVC sticker	4pcs
LED Power	2.5W
Light Source	16pcs LED(White)
LED lifespan	>50,000 hours
Work mode	Maintain
Installation	Ceiling or wall mount
Indicator	Red-Charging
cable	No,only AU connectors
Protection	Over-charge /over-discharge
Standard	AS/NZS 2293 IEC 60598-2-22

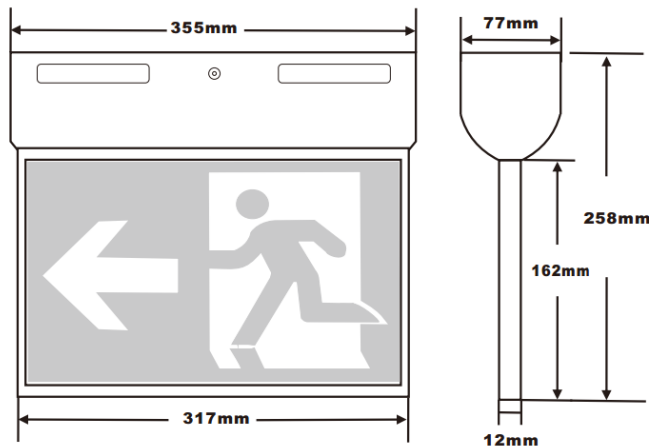

Model No.	classification	Operation	Charging mode	Discharging duration	Emergency mode battery	DC power
SP-2003-WH	24M	maintain	2.5W	120min	NI-MH 4.8V800MAH	1W
SP-2003-BK	24M	maintain	2.5W	120min	NI-MH 4.8V800MAH	1W



Tested By



Certified By



AS/NZS 2293 CERTIFIED