



## SEL20PK - EM POWER KIT


MAINTAINED - SEL20PK Emergency Power Kit - 5.5W

### Application

A perfect choice for commercial spaces

### Design Specifications

- Emergency lighting power kit compliant to AS/NZS 61347.2 and when combined with a SAL Panel system, compliance to AS/NZS 2293 is achieved
- Compact design IP20, integral 5.5W emergency control gear with integral long life Lithium battery technology
- Plug and Play design to enable the conversion of a SAL Panel into a Maintained Emergency system, saving installation time and money
- LED charge status indicator and test switch, designed with adhesive tape for quick installation, thus avoiding the need to drill the luminaire.
- Guaranteed 90 minutes emergency function.




### Performance

- Dimmable - **NO**





### Technical Specification

Product	Model No.	Input Voltage (V/AC)	Power (W)	Body Colour	Mass (kg)
	SEL20PK	240	5.5	WHITE	0.55

**Important notes:** (1) Battery warranty twelve (12) months (2) Continual use in emergency mode greater than 240 hours without recharge, will result in battery failure and void battery warranty.

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with SAL Terms and Conditions of sale and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

## Dimensions

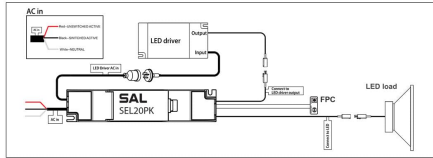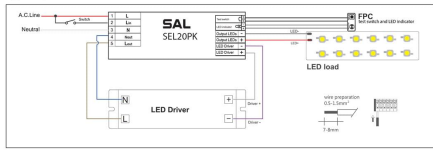

Explanation of LED indicator

Colour	LED indication	Status	Comment
Green	Slow flashing (3 sec on, 1 sec off)	Charging Mode	AC Mode
Green	Permanent green	Fully Charged	AC Mode
Red	Slow flashing (3 sec on, 1 sec off)	Battery failure	Battery failed/ No battery
Off	LED indicator off	Emergency Mode	Battery discharging

AS/NZS 2292.1:2018

EMERGENCY LUMINAIRE TYPE	NORMAL OPERATION (i.e. MAINS OPERATING)	EMERGENCY OPERATION (i.e. MAINS FAILED)
NON-MAINTAINED (CLAUSE 1.5.35)	or	or
MAINTAINED (CLAUSE 1.5.31)	or	or
COMBINED NON-MAINTAINED (i.e. 'SUSTAINED') (CLAUSES 1.5.8 AND 1.5.47)		
COMBINED MAINTAINED (CLAUSES 1.5.8, 1.5.9 AND 1.5.31)		

LEGEND:  
 = Non-energized lamp  
 = Energized lamp

FIGURE 1.1 EXAMPLES OF EMERGENCY LUMINAIRE CONNECTION TYPES