



## UNDER BENCH UTILITY LED GLOBES

- Input voltage: 12V DC
- Plugs into DC power supply or 12V battery
- Surround for round fitting is white
- Surround for RGB & square fitting is stainless steel
- The fittings come with 2.45m cable
- Everlight 3020 LED chips
- Extremely low power consumption
- Quick and easy D.I.Y. installation
- Screws and double sided tape included
- No UV/IR radiation
- Equivalent to 15W halogen output
- Single colour model dimmable with CLAKZQ9B or CLAKZQ5
- RGB model dimmable with CLAKZQ9A



▲ CLALEDRNDWHUB

50,000 HRS	BEAM 120°	IP 20	3 YEAR WARRANTY	DIMMABLE
---------------	--------------	----------	--------------------	----------



▲ CLALEDSQSCUB



▲ CLALEDRNDSCUBRGB


CODE	DESCRIPTION					DIMENSIONS		
		KELVIN (K)	LUMENS (LM)	WATT (W)	CRI	DIAM (mm)	DEPTH (mm)	CARTON QTY
CLALEDRNDCUBRGB	1.2W RND RGB	RGB	-	1.2	85	Ø50	6	1/100
CLALEDRNDWHUBWW	1.4W RND 3200K	3200K	48	1.4	85	Ø50	6	1/100
CLALEDRNDWHUBCW	1.4W RND 5000K	5000K	56	1.4	85	Ø50	6	1/100
CLALEDSQSCUBWW	1.4W SQ 3200K	3200K	44	1.4	85	52x52	6	1/100
CLALEDSQSCUBCW	1.4W SQ 5000K	5000K	52	1.4	85	52x52	6	1/100

## Accessories

CODE	DESCRIPTION
CLA15WSTRIPDRIVER	15W LED STRIP DRIVER CONSTANT VOLTAGE
CLAJB4A	4-WAY JUNCTION BOX FOR SINGLE COLOUR LED UNDER BENCH UTILITY LIGHT
CLAJB6A	6-WAY JUNCTION BOX FOR SINGLE COLOUR LED UNDER BENCH UTILITY LIGHT
CLAJB12A	12-WAY JUNCTION BOX FOR SINGLE COLOUR LED UNDER BENCH UTILITY LIGHT
CLARGBCONTROLLER	RGB CONTROLLER IN LINE WITH 4-WAY JUNCTION BOX
CLAKZQ5	SINGLE COLOUR LED DIMMER & SWITCH
CLAKZQ9A	RGB LED RECEIVER & REMOTE CONTROLLER
CLAKZQ9B (incl. CLAKZQ9BCABLE)	SINGLE COLOUR LED DIMMER & RECEIVER & REMOTE



▲ CLA15WSTRIPDRIVER

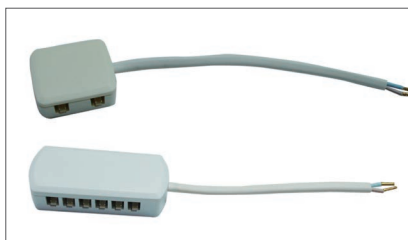

▲ CLAJB4A, 6A, 12A



▲ CLARGBCONTROLLER



▲ CLAKZQ5



▲ CLAKZQ9A



▲ CLAKZQ9B

TO RUN 6	
CLA15WSTRIPDRIVER	x1
CLAJB6A	x1
CLALEDRNDWHUBWW	x6
CLALEDRNDWHUBCW	x6
CLALEDSQSCUBWW	x6
CLALEDSQSCUBCW	x6

GROUP: INUTIL