Data Sheet



Last modification

2022-09-27

BLISS 97XL.R-3C 9329501050200



Overview

Family nameBlissCategoriesOystersMountingSurfaceThis item includesRF Remote

Switch Remote Control (included)
Usage Indoor Lighting,Trade Selection

Color / Material

Fixture Color Opaline

Fixture Material Metal, Polycarbonate

Canopy Color White

Diffuser Material Polycarbonate

Diffuser Color Opal

<u>Size</u>

Fixture Diameter (cm) 97.0
Fixture Height (cm) 15.6
Fixture Projection (cm) 15.6
Canopy Diameter (cm) 93.0
Canopy Projection (cm) 1.0

Specification

Voltage Input 240V Wattage (max) 80

Globe Type LED integrated SMD

Globe / Light Source qty 1
Globe / Light Source included Yes
Lumens 6700

Color Temperature Warm White; Natural White; Cool White

Color Kelvin 3 CCT (3000k - 4000k - 5500k)

Color Rendering >84

Dimmable Yes - Remote Control RF

All representations within this document are subject to copyright. ELECTRICAL INSTALLATIONS MUST BE PERFORMED BY A QUALIFIED ELECTRICAL CONTRACTOR AND INSTALLED IN ACCORDANCE WITH AS/NZS 3000.

NOTE: All images, descriptions and dimensions are indicative. Please check latest version of item detail on Telbix website prior to ordering or installation.

Data Sheet



Power Factor >0.90 Surge Protection Yes (1.5 Kva)

Beam Angle (degree)180Current Output1400

Electrical Protection CLASS I - HIGH VOLTAGE, EARTH REQUIRED

IP rating IP20
Lead and Plug No
Approvals RCM
Assembly Required No

Box ContentsBasic mounting screws, InstructionInstallation RequiredYes (by Licensed Electrician only)


Care Instructions Do not use strong liquid cleaners, Wipe clean with a dry cloth

Warranty *3 Years

Barcode

GTIN 9329501050200

Image -dimensions

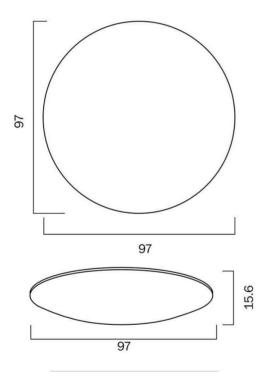

All representations within this document are subject to copyright.ELECTRICAL INSTALLATIONS MUST BE PERFORMED BY A QUALIFIED ELECTRICAL CONTRACTOR AND INSTALLED IN ACCORDANCE WITH AS/NZS 3000. NOTE: All images, descriptions and dimensions are indicative. Please check latest version of item detail on Telbix website prior to ordering or installation.

