HUNZA PURE OUTDOOR

Ceiling Mount

PROJECT:

TYPE:

SOURCE:

NOTES:

SPECIFICATIONS


IP66 (E	CUL US
---------------	---	--------

LED Chip	Cree CXA 2540 field replaceable LED board	
Luminaire Output	5000 Lumens @ 1400mA (52 watts) , Delivered from Luminaire with unobstructed beam.	
Lumens Per Watt	90 Lumens minimum @ 52 watts, Delivered from Luminaire with unobstructed beam	
CRI (3000K)	80 Standard, 90+ Optional	
Colour Temperatures	2700K, 3000K, 4000K	
Beam Angles	13, 22, 33, 51	
Ingress Protection	IP66	
Warranty	Electronics = 5 years Body Aluminium = 5 years	
Standards	BS/EN 60598.2.2 cUL 1598 CE	



PRODUCT CONFIGURATION

Please fill in appropriate codes into boxes provided

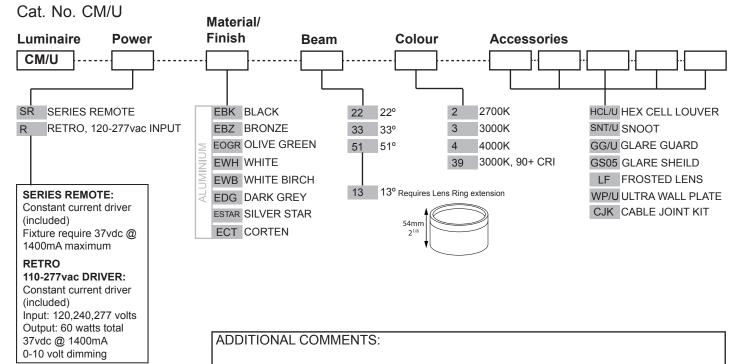



HUNZA FACTORY 130 Felton Mathew Ave Saint Johns Auckland 1072 New Zealand

athew Ave Ph: +64 Fax: +64 2 hunza@ www.hu

Ph: +64-9-528 9471 INT Fax: +64-9-528 9361 http hunza@hunza.co.nz www.hunzalighting.com

INTERNATIONAL CONTACTS: http://www.hunzalighting.com/contact.php Specifications may change without notice. This document contains proprietary information of Hunza. Its receipt or possession does not convey an rights to reproduce or disclose it

LUMINAIRE CONSTRUCTION

CNC machined from one of the following metals:

Body - solid high corrosion resistant 127mm (5") aluminium rod. Base - high corrosion resistant 127mm (5") x

3.18mm (1/8") aluminium tube. Finished with chromate substrate, Epoxy layer and a UV resistant polyester powder

coat colour. Fixings and Mechanism - made from 316 Stainless Steel

Colours:

Black, Bronze, Silver Star, White, Birch, Olive Green, Dark Grey, Corten.

Step Lens:

12mm (1/2") Extra clear, low iron, shatter resistant glass. Lifetime warranty


Gaskets:

Silicone, iron impregnated 220°C (428°F) Cable: Water resistant rubber

Mounting:

The mounting plate is fixed to the surface using three stainless screws. The luminaire is then fixed to the mounting plate


Luminaire Weight: 5kg (11 lbs)

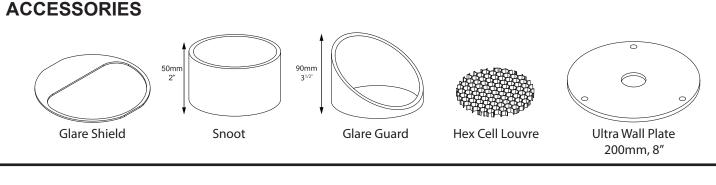


BEAM ANGLES

High efficiency Reflectors. Feild replaceable

IES files available for download: www.hunzalighting.com/download.php

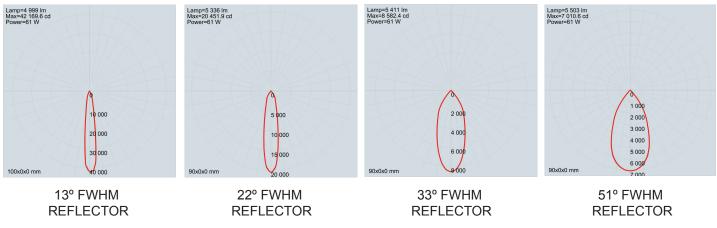


WIRING GUIDE

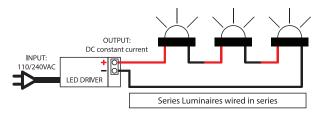

Diagrams are a guide only, wire colours and polarity may change depending on fixture and country

available for download: www.hunzalighting.com/download.php

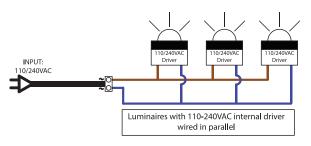



HUNZA FACTORY Saint Johns Auckland 1072 New Zealand

130 Felton Mathew Ave

Ph: +64-9-528 9471 Fax: +64-9-528 9361 hunza@hunza.co.nz www.hunzalighting.com

Aug 2017 Specifications may change without notification INTERNATIONAL CONTACTS: http://www.hunzalighting.com/contact.php This document contains proprietary information of Hunza. Its receipt or po not convey an rights to reproduce or disclose its content.