## **Data Sheet**

2023-01-22



Last modification

## MDL-16D-850 9329501038260



#### MODULE 16 with TWIST-ON SYSTEM 12watt DIMMABLE with LEAD&PLUG 5000K - 880Lm

#### **Overview**

Family name Module
Categories Downlights
Mounting Recess

**Usage** Indoor Lighting,Trade Selection

#### Color / Material

Fixture Color Black
Fixture Material Aluminium
Cable Color Black
Cable Material PVC

#### Size

Fixture Diameter (cm) 5.0 Fixture Height (cm) 7.5

#### **Specification**

Voltage Input 240V Wattage (max) 12

Globe Type LED integrated COB

Globe / Light Source qty 1 Globe / Light Source included Yes Lumens 880 Cool White **Color Temperature Color Kelvin** 5000k **Color Rendering** >84 **Dimmable** Yes >0.95 **Power Factor Surge Protection** Yes **Current Output** 250

All representations within this document are subject to copyright.ELECTRICAL INSTALLATIONS MUST BE PERFORMED BY A QUALIFIED ELECTRICAL CONTRACTOR AND INSTALLED IN ACCORDANCE WITH AS/NZS 3000.

NOTE: All images, descriptions and dimensions are indicative. Please check latest version of item detail on Telbix website prior to ordering or installation.

# **Data Sheet**



Insulation class IC-4
IP rating IP44
Lead and Plug Yes
Approvals RCM

Box Contents Instruction

Installation Required Yes (by Licensed Electrician only)


Care Instructions Do not use strong liquid cleaners, Wipe clean with a dry cloth

**Replacement Warranty** \*5 Years

<u>Barcode</u>

**GTIN** 9329501038260

## **Image -dimensions**

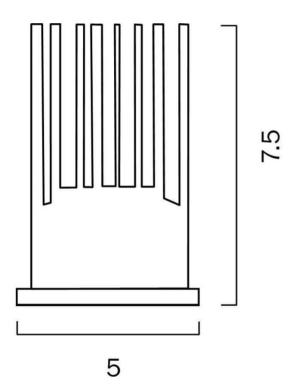

All representations within this document are subject to copyright.ELECTRICAL INSTALLATIONS MUST BE PERFORMED BY A QUALIFIED ELECTRICAL CONTRACTOR AND INSTALLED IN ACCORDANCE WITH AS/NZS 3000.

NOTE: All images, descriptions and dimensions are indicative. Please check latest version of item detail on Telbix website prior to ordering or installation.