








Assembly Instructions For

F2462/4 (E) 5/09

Extra PIN Qty.	PIN PART	PIN DESCRIPTION
12		Rectangular Crystal Hook
24		Small Bead Hook

	①	②	③	④
				
Required	X1	X18	X20	X20
Extra	1	2	3	3

NOTE:
SMALLER
RECTANGULAR
CRYSTAL MUST BE
INSTALLED AT TOP

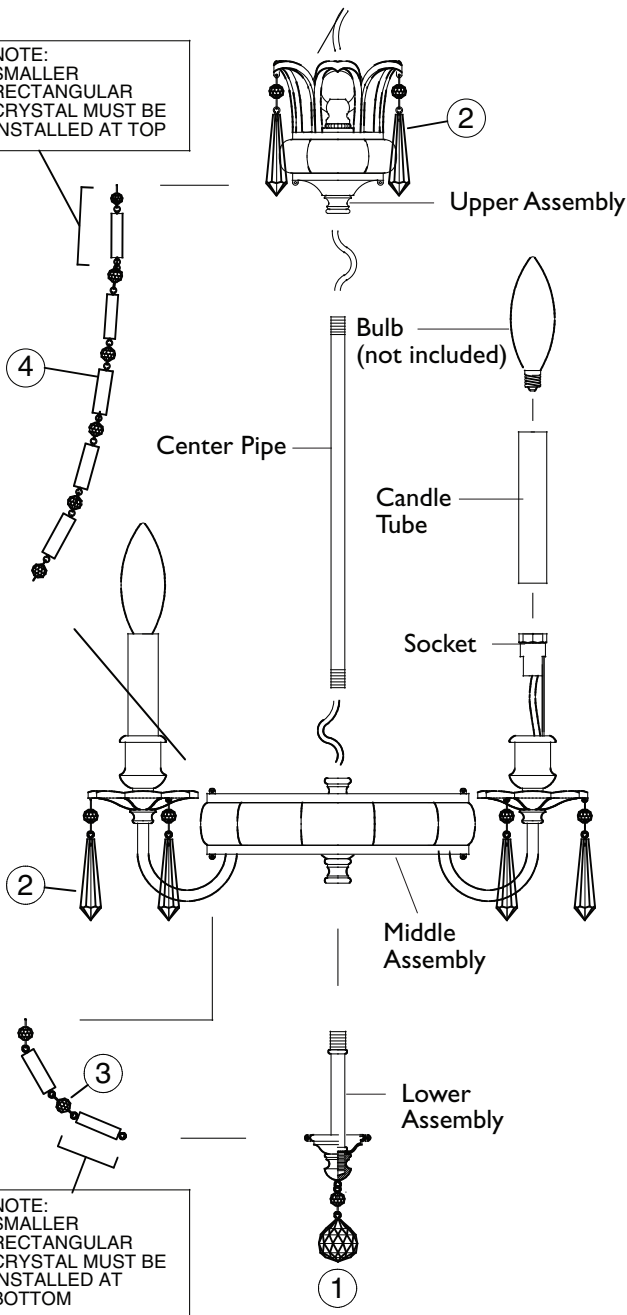

IMPORTANT TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

Carefully unpack and identify all parts before assembly. Bulbs not included.

- A. Slip center pipe through fixture wires and then secure by screwing onto top of middle assembly.
B. Slip upper assembly through fixture wires and then secure by screwing onto top of center pipe.
- Follow enclosed supplement installation instructions for electrical and fixture installation onto house outlet box. If you do not have an outlet box at desired location to attach the fixture then hire a qualified electrician to create one.
- Install lower assembly by screwing onto bottom of the middle assembly.
- A. Install candle tube by slipping through sockets.
B. Install type-B, candelabra base, of 60 Watt maximum bulbs (not included).
- Hang all crystal glass parts as shown on drawing.

NOTE:

- For easier installation of crystal chains #3, hook all chains (the end with smaller rectangular crystal) first onto the lower assembly and then proceed to hook onto the middle assembly.
- For easier installation of crystal chains #4, hook all chains (the end with smaller rectangular crystal) first onto the upper assembly and then proceed to hook onto the middle assembly.
- To replace broken crystal or pin, extras are included in hardware bag. Replace by gently bending open pin, remove broken crystal or pin, hook new one, then close back pin. Avoid bending pin into sharp angle.



**MURRAY
FEISS**
Generation Brands™