

# SMART SWITCH

## SWL350BT

### FEATURES: WHEN USED INDEPENDENTLY

- Push on/off

### FEATURES: WHEN USED IN CONJUNCTION WITH THE "PIXIE" APP



- **TIMER FUNCTION:** set switches or switch groups to remain on for set time
- **SCHEDULE FUNCTION:** set switches or switch groups to turn on and off at required times and days of the week
- **GROUP FUNCTION:** group switches together into switch groups
- **SCENE FUNCTION:** set up a range of scenarios (scenes) by individual switches or switch groups

### SPECIFICATION


- Fit most branded switch plates. 1, 2 or 3 gang
- Overheating, overload and full short circuit protection
- SMART LED indicator
- Complies to AS/NZS 60669.2.1
- Retentive terminal screws and loop terminal

### TYPICAL WIRELESS RANGE


- 15 m dependant on installation environment



### DIMENSIONS

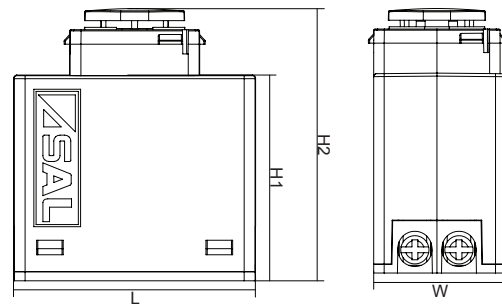

### WIRING DIAGRAM

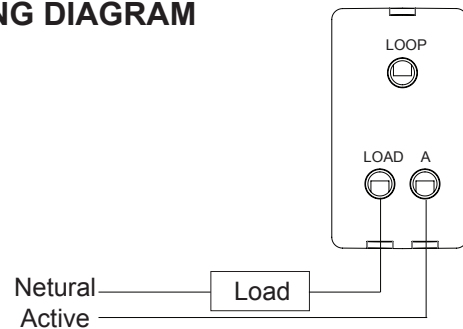

| Model No. | Input       | Frequency | Max. Load | Min. Load | Dimensions L x H1 x H2 x W | Operating temp. |
|-----------|-------------|-----------|-----------|-----------|----------------------------|-----------------|
| SWL350BT  | 220V - 240V | 50Hz/60Hz | 350W      | 13W       | 40 x 34 x 45 x 22.5 mm     | -20~40°C        |



Go to App store (IOS) or Google Play (Android) to download the free PIXIE app to your smart phone.

IOS: Requires IOS 6.0 or later. Compatible with iPhone, iPad and iPad touch

Android: Requires Android 4.4 or above, devices must support Bluetooth 4.0



www.sal.net.au