

240V	13W rated 15W w/driver	15W rated 17W w/driver	18W rated 21W w/driver	24W rated 26W w/driver	SMD LED	IP44	100° BEAM ANGLE	CRI (Ra) >82	POWER FACTOR 0.99	IC-4
	19761	19762	19763	19764						

Brilliant offers a range of LED recessed lights as replacements for common CFL fittings found in offices, hotels and other commercial environments.

FEATURES


- Change between Warm White (3000K), Cool White (4200K) & Daylight (6500K) via a switch on the back of the downlight.
- Rated for IC Abutted and Covered usage to allow for covering with thermal insulation.
- Wide 100 degree beam angle.
- SAA approved with external dimmable LED driver.
- Long lasting up to 30,000 hours¹.
- 1m flex & plug fitted.
- IP44 (front only).
- Four common cut-out sizes to suit most Retrofit applications.
- 3 Year Warranty.

MAIN APPLICATIONS

All interior domestic and commercial rooms.

MODEL NO.	WATTAGE (W)	LUMENS @ 3000K (lm)	LUMENS @ 4200K (lm)	LUMENS @ 6500K (lm)	CUT-OUT (mm)	FITTING COLOUR
19761/05	13	820	920	820	120	WHITE
19762/05	15	1150	1300	1150	140	WHITE
19763/05	18	1300	1500	1300	160	WHITE
19764/05	24	1800	2000	1800	200	WHITE

¹ Actual life may vary depending on individual circumstances.

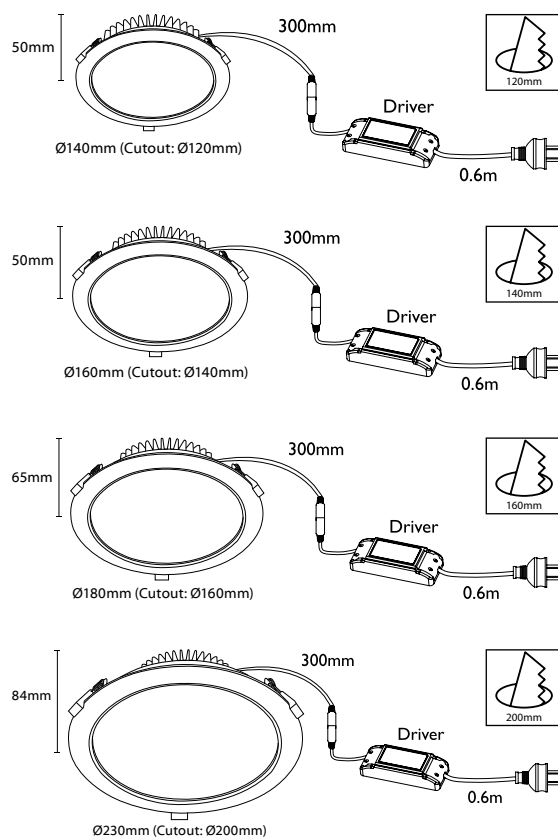

Product Image

Code & Colour

Wattage

Lumens @ 3000K

Lumens @ 4200K

Lumens @ 6500K

Cut-out

Lux Graph



19761/05
WHITE

13
WATTS

820
LUMENS


920
LUMENS

820
LUMENS

120
MILLIMETRES

13W

3000K 820lm 4200K 920lm 6500K 820lm

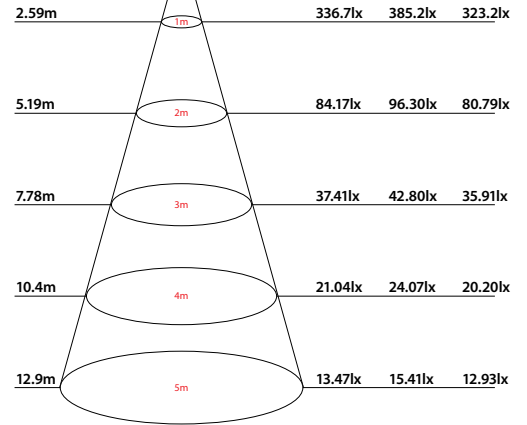

19762/05
WHITE

15
WATTS

1150
LUMENS


1300
LUMENS

1150
LUMENS

140
MILLIMETRES

15W

3000K 1150lm 4200K 1300lm 6500K 1150lm

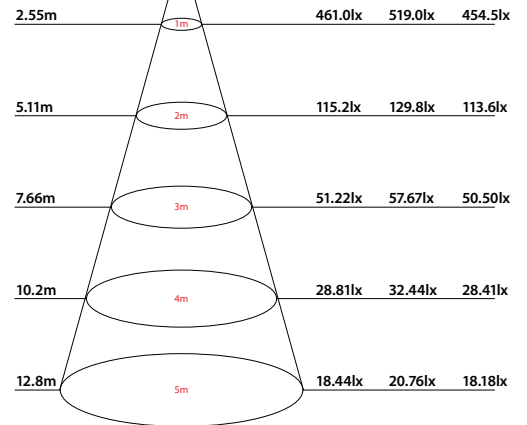

19763/05
WHITE

18
WATTS

1300
LUMENS


1500
LUMENS

1300
LUMENS

160
MILLIMETRES

18W

3000K 1300lm 4200K 1500lm 6500K 1300lm

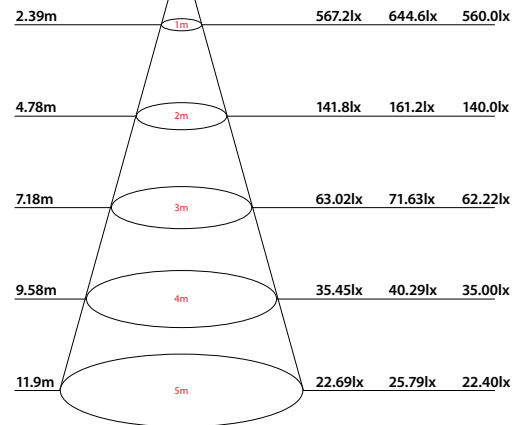

19764/05
WHITE

24
WATTS

1800
LUMENS

2000
LUMENS

1800
LUMENS

200
MILLIMETRES

24W

3000K 1800lm 4200K 2000lm 6500K 1800lm

