



BRONX SE7089 - 55W

Vandal resistant, IP65 LED wall mount luminaire, IK10 rated

Application

A robust solution for commercial exterior spaces and security

Design Specifications

- Die-cast aluminium body
- Durable black powder coated finish
- UV stabilised opal polycarbonate diffuser
- High efficiency SMD LED chips
- Integral constant current non-dimmable LED driver, pre-wired with 450mm of 3 x core rubber flex

Performance

In Built Sensor - **OPTIONAL**

Sensor Type - **MICROWAVE**



Technical Specification


Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI	Body Colour
SE7089BK	240	55	4500	5000	70	BLACK

Model No.	Dim (mm)
SE7089BK	265(L) x 190(W) x 301(H)

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".


Dimensions

SE7089

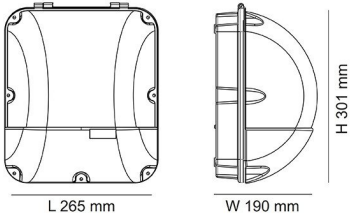

Photometric Data

Unit: cd C0/C180 — C90/C270 —





PIXIE AMBIENCE, CHANGE YOUR COLOUR TO MATCH YOUR STYLE.

The innovative PIXIE AMBIENCE SWITCH PLATES have been designed with the end user and installer in mind, allowing you to change the colour face plate as fashion demands.

For more
information
please
scan me

