



HALO SO3000 - 18/35W

Dimmable architectural LED ceiling luminaire

Application

A creative design for residential or commercial spaces

Design Specifications

- Slim disc like appearance, 18 or 35 watt models
- Durable polycarbonate body profile with opal acrylic diffuser
- Simple twist lock installation mechanism
- High efficiency SMD LED chips, CCT 4000K standard, optional 3000K
- Integral constant current trailing edge dimmable LED driver
- Trim standard black

Performance

Dimmable - **YES**

Dimmer Type - **Trailing edge**



Technical Specification

Model No.	Description	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI
SO3000/30CW	LED CEILING 18W 300mm 4K BK	240	18	1450	4000	80
SO3000/40CW	LED CEILING 35W 400mm 4K BK	240	35	3300	4000	80

Technical Specification

Model No.	Dimmable	Dim (mm)	Diameter (mm)	Body Colour
SO3000/30CW	YES	300(W) x 51(H)	300	BLACK
SO3000/40CW	YES	400(W) x 68(H)	400	BLACK


Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".



Photometric Data

Unit: cd C0/C180 — C30/C210 —
 cd C60/C240 — C90/C270 —

SO3000/30CW at 4000K

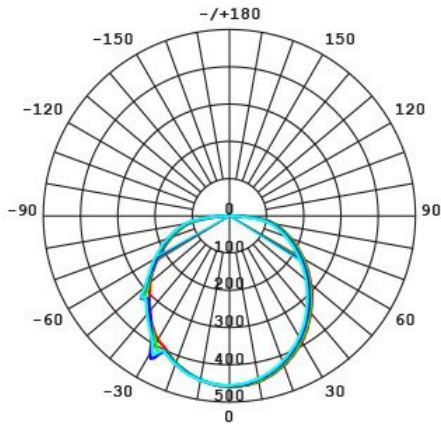

SO3000/40CW at 4000K

