



OPAL II SO3800TC - 30W

30 watt dimmable LED Oyster with selectable colour temperature

Application

A perfect choice for apartments, residential or commercial spaces

Design Specifications

- Selectable colour temperature with integral DIP switch, 3000K, 4000K, 6000K,
- 30 watt integral constant current trailing edge dimmable LED driver (excluding SO3800/40TC/S, SO3800/40TC/EMS)
- Durable powder coated steel body profile, colour white
- Opal polycarbonate diffuser
- High efficiency SMD LED chips, CRI > 80
- Sensor models (SO3800/40TC/S, SO3800/40TC/EMS): Microwave sensor mounting height is 2-3hm, sensor detection range is 3-5mtr radius (adjustable) and the timer range is 10sec- 12min (adjustable) with 360 degree detection visibility. Ambient light <3-2000lux.



Performance

Dimmable - **YES**
 Dimmer Type - **Trailing edge, (excluding sensor models)**
 In Built Sensor - **YES**
 Sensor Type - **MICROWAVE**

Technical Specification

Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI	Dimmable
SO3800/40TC	240	30	2400/2600/2500	3000/4000/5700	80	YES
SO3800/40TC/EM	240	30	2400/2600/2500	3000/4000/5700	80	YES
SO3800/40TC/S	240	30	2400/2600/2500	3000/4000/5700	80	NO
SO3800/40TC/EMS	240	30	2400/2600/2500	3000/4000/5700	80	NO

Model No.	Body Colour	Diameter (mm)	Dim (mm)	iPART
SO3800/40TC	WHITE	350	90(H)	YES
SO3800/40TC/EM	WHITE	350	90(H)	
SO3800/40TC/S	WHITE	350	90(H)	
SO3800/40TC/EMS	WHITE	350	90(H)	

Emergency models - (SO3800/40TC/EM, SO3800/40TC/EMS): Compliant to AS2293, LiFePO4 battery included


Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the



time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

SO3800/40

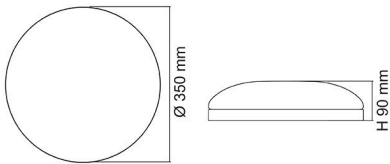


Photometric Data

Unit: cd C0/C180 — C90/C270 —

SO3800/40TC at 3000K

SO3800/40TC/S at 5700K

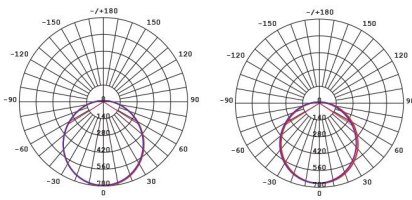

PIXIE AMBIENCE, CHANGE YOUR STYLE.



PIXIE AMBIENCE GPO SMART SOCKET
SPO23/BTAM



For more
information
please
scan me

