



PANEL MK III S9764 TC - 18W


LED panel with selectable colour temperature

Application

Designed for commercial and office space lighting tasks.

Design Specifications

- Extruded aluminium profile with high efficiency opal diffuser suitable for a range of installation types.
- Quality white powder coated finish
- High efficiency SMD LED chips, CRI > 80
- Remote constant current non-dimmable LED driver, complete with flex and plug
- Easy selectable colour temperature with an inbuilt DIP switch, 3000K / 4000K / 5700K
- Suspended wire kits unavailable for this panel series

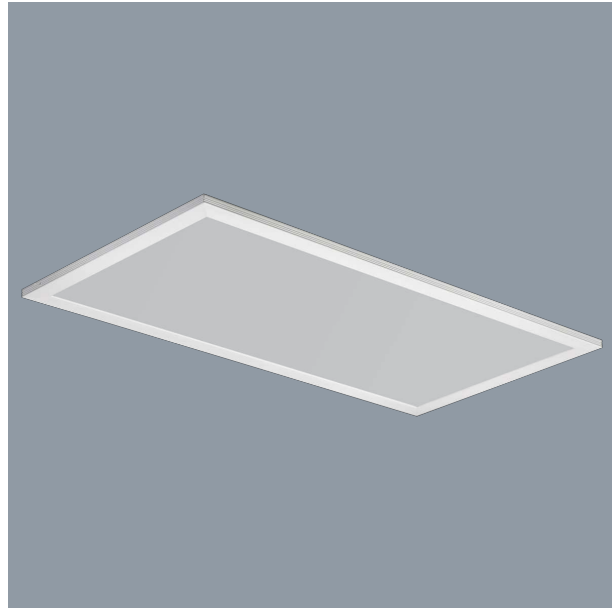

Technical Specification

Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI	Beam Angle (°)
S9754/306TC	240	18	1900/2000/2100	3000/4000/5700	80	100

Model No.	Body Colour	Dim (mm)
S9754/306TC	White	595(L) x 295(W) x 12(H)

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".



LED downlights, oysters, linear battens and profiles,
track lights, strip lights, interior architectural, highbays,
lamps, emergency, floodlights, exterior architectural,
weatherproof, bulkheads, sensors, electrical accessories,
smart lighting controls, drivers

For more
information
please
scan me

