


LED INGROUND LIGHT

S9342, S9343, S9344, S9345 GEO



DIMENSIONS

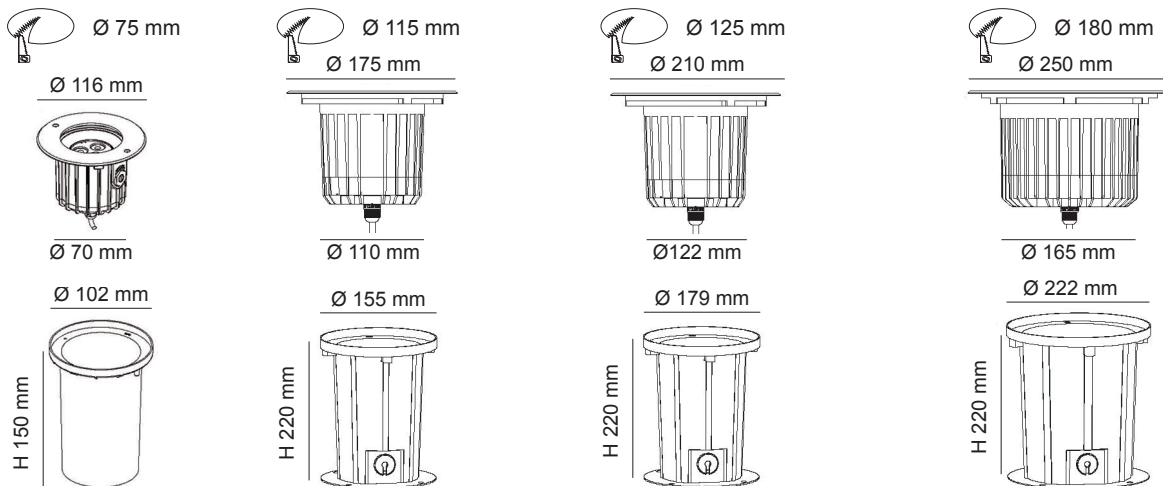

CONSTRUCTION

- 316L stainless steel face cover
- Die-cast aluminium body
- Clear tempered glass diffuser
- High output COB LED chip
- High performance multi-reflector system
- Built-in constant current non-dimmable LED driver

- Silicon gasket
- IP68 PG11 PVC cable gland
- Stainless steel allen screws
- PVC installation canister included
- 450 mm 3 core rubber flex

IP RATING

- IP67 weatherproof

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Fitting Colour	Load Pressure Capacity
S9342WW	240V	8W	400lm	3000K	24°	>80	Stainless Steel	3000 kg
S9342CW	240V	8W	450lm	4000K	24°	>80	Stainless Steel	3000 kg
S9343WW	240V	13W	600lm	3000K	24°	>80	Stainless Steel	4400 kg
S9343CW	240V	13W	700lm	4000K	24°	>80	Stainless Steel	4400 kg
S9344WW	240V	20W	1200lm	3000K	24°	>80	Stainless Steel	4900 kg
S9344CW	240V	20W	1400lm	4000K	24°	>80	Stainless Steel	4900 kg
S9345WW	240V	32W	2000lm	3000K	24°	>80	Stainless Steel	5000 kg
S9345CW	240V	32W	2200lm	4000K	24°	>80	Stainless Steel	5000 kg