



LED HIGH OUTPUT PANEL

S9714HO/TC PANEL

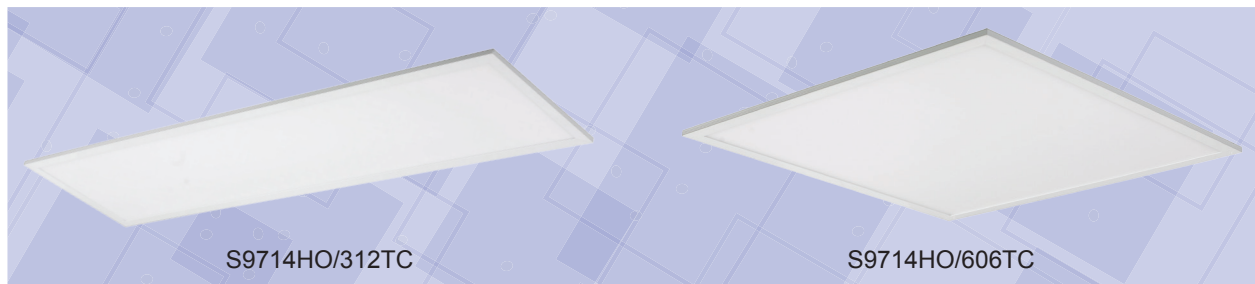

DIMENSIONS

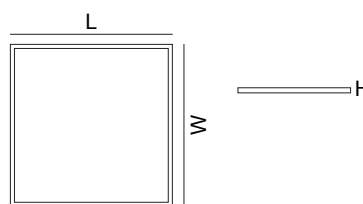

CONSTRUCTION

- Colour temperature selectable by DIP switch
- Extruded aluminium frame
- Powder coated finish
- High efficiency opal polystyrene back diffuser
- High efficiency SMD LED chips
- Constant current non-dimmable LED driver fitted
- 1.2 m flex & 2 pin plug
- RippleFREE driver for visual comfort
- Low glare
- Emergency option available

IP RATING

- IP20 suitable for interior use only

DIMMING OPTIONS

- 1-10V analogue
- DALI / DSI, digital

INSTALLATION TYPES

- Standard metric T-Bar ceiling recessed installation
Air Slot models to suit –/312 panel sizes
- Plaster ceiling recessed installation
(S9704 Plaster ceiling frame required)
- Clean Room models to suit –/606, –/312 panel sizes
- Surface mounted installation (S312FM, S606FM surface mounted frame required)
- Suspended installation
(SSI1512 & S9714SP6 or SSI1512 & S9714SP6 Suspension Kits required)

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Fitting Colour	Dimensions L x W x H
S9714HO/312TC	240V	40W	3600lm/ 4000lm/ 3800lm	3000K/4000K/5700K	100°	>80	White	1195 x 295 x 12 mm
S9714HO/606TC	240V	40W	3700lm/ 4200lm/ 4000lm	3000K/4000K/5700K	100°	>80	White	595 x 595 x 12 mm

WIRING DIAGRAM

