

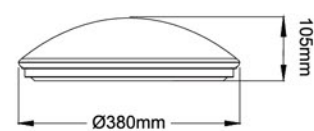


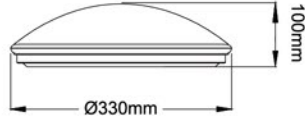

DIMENSIONS

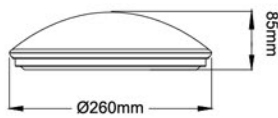

PRODUCT FEATURES

- Luminaire efficacy of up to 95 lm/W.
- Pre-set tri-color-temperature switch for diverse needs.
- Includes built-in driver.
- Housing part with good heat dissipation and anti-shock compact structure to make it free from visible catches.
- Energy saving and international approval with CE, RoHS, SAA. Perfect used in home.

PACKAGING(15W)

- Packaging L295*W103*H295mm
- Carton 8pcs/CTN
- Carton Size L85.5*W31.5*H32mm

PACKAGING(30W)

- Packaging L415*W135*H390mm
- Carton 5pcs/CTN
- Carton Size L70*W43.5*H41.5mm

PACKAGING(18W)

- Packaging L340*W340*H110mm
- Carton 5pcs/CTN
- Carton Size L57.5*W36*H36mm


Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour
AC1011-LED-15W	200-240V	15W	1440lm/1665lm 1500lm	3000K/4000K 5000K	120°	>80	No	White

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour
AC1011-LED-18W	200-240V	18W	1510lm/1770lm 1610lm	3000K/4000K 5000K	120°	>80	No	White

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour
AC1011-LED-30W	200-240V	30W	1825lm/2145lm 1970lm	3000K/4000K 5000K	120°	>80	No	White

PHOTOMETRIC DATA

AC1011-LED-15W AC1011-LED-18W

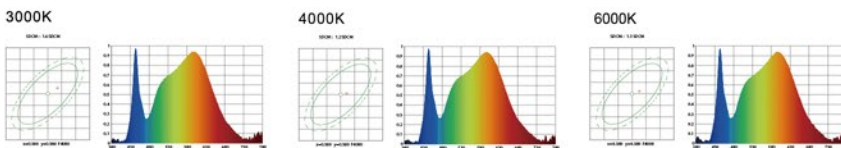

AC1011-LED-30W

