
SLIM RECESSED MOUNT LED EXIT 24M


The SP-2002 is designed as a slim recessed mount emergency exit light allowing 3hours minimum lighting after power cut.

4pcs PVC stickers are included.

Usage: widely used in modern hotels, shops and other public places, security evacuation and guide.

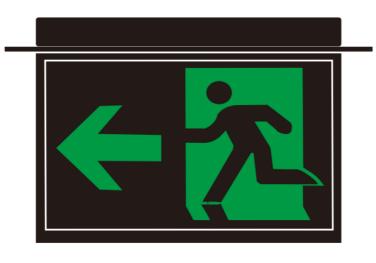

Item code	SP-2002BK		
Input Voltage	220-240AC		
Frequency	50/60Hz		
Battery	4.8V 800mAh NI-MH		
Charge time	16 hours		
Discharge time	2 hours		
Operating Temp	0°C~40°C		
Side	Single/double		
IP Grade	IP20		
Material of the Lamp	Flame retardant (V-0)		
Size of the Lamp	show as below		
PVC sticker	4pcs		
LED Power	2.5W		
Light Source	16pcs LED(White)		
LED lifespan	>50,000 hours		
Work mode	Maintain		
Installation	Recessed		
Indicator	Red-Charging		
cable	Flex and AU plug		
Protection	Over-charge		
FIOLECTION	/over-discharge		
Standard	AS/NZS 2293		
Glandard	IEC 60598-2-22		

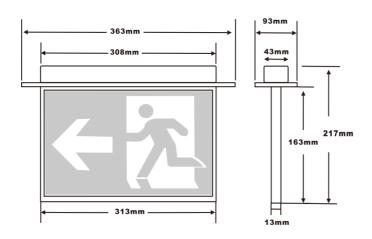

Model No. classification	Operation	Charging	Discharging	Emergency	DC power	
		mode	duration	mode battery		
SP-2002-WH 24M	2414	maintain	2 5 1 1	120min	NI-MH	110/
	maintain	2.5W	120min	4.8V800MAH	1W	
SP-2002-BK 24M	maintain	2.5W	120min	NI-MH	1W	
				4.8V800MAH		

















