



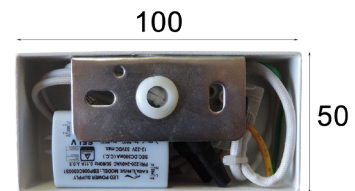

ATHENSG2

LED Interior Surface Mounted Wall Light

- Input voltage: 220-240V AC 50/60Hz
- Inbuilt constant current LED driver included
- Driver output voltage: 12-22V
- Driver input current: 0.11A
- Driver output current: 0.3A
- Power factor: 0.5
- Material: powder coated aluminium+iron
- Ambient Temp: -20 to 50°C (The life of the lamp will gradually reduce if used outside these temperature parameters)
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR & Microwave sensors

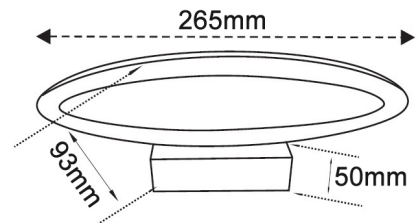

Back Plate

30,000hr Lifetime	120° Beam Angle	IP20 Rated	2YEAR Replacement Warranty
----------------------	--------------------	----------------------	---

PART NO.	KELVIN (K)	LUMENS (LM)	Lumious Efficiency	WATT (W)	LEDs	CRI	WEIGHT (Kg)	BOX (cm)	CARTON QTY
ATHENSG2	3000	460	68lm/W	6W	36pcs 2835	≥80	0.66	18x12x6	12

Brochure updated on 03.05.2018