



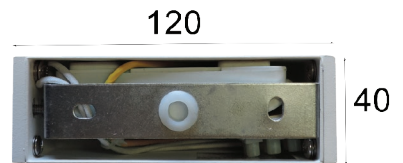

DAVOS

LED Interior Surface Mounted Wall Light

- Input voltage: 220-240V AC 50/60Hz
- Inbuilt constant current LED driver included
- Driver output voltage: 12-22V
- Driver input current: 0.11A
- Driver output current: 0.3A
- Power factor: 0.5
- Material: iron & aluminium powder coated white & acrylic
- Ambient Temp: -20 to 50°C (The life of the lamp will gradually reduce if used outside these temperature parameters)
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR & Microwave sensors



Back Plate

Depth: 45mm
Mounting U Bracket: 100x20mm
Central 10mm cable hole



PART NO.	KELVIN (K)	LUMENS (LM)	Lumious Efficiency (lm/W)	WATT (W)	LEDs	CRI	WEIGHT (Kg)	BOX (cm)	CARTON QTY
DAVOS	3000	480	71	6	1pc 2835 COB	>=80	1.0	24x19x15	12

Brochure updated on 11.05.2018