




G4 BI-PIN LED GLOBES

- Input voltage: 12V DC constant voltage
- Wattage: 0.9W & 1.5W
- Epistar LED chips
- Runs off 12V DC battery or remote constant voltage LED driver
- G4 base only
- Must be wired parallel
- Ambient temp: -30 to 40°C
- Max.distance to light source: 30m
- Not suitable for dimming

30,000 HRS | BEAM >120° | 3 YEAR WARRANTY

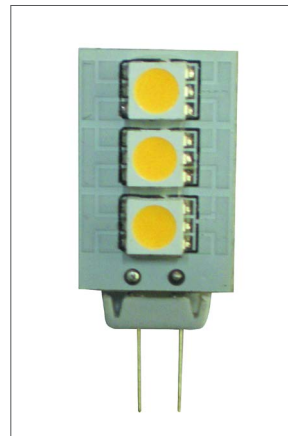

▲ CLAG4L3



▲ CLAG4L15

CODE	DESCRIPTION	TECHNICAL DATA					DIMENSIONS		
		BASE	KELVIN (K)	LUMENS (LM)	WATT (W)	CRI	LENGTH (mm)	DIAM (mm)	CARTON QTY
CLAG4L15WW	LED G4 BI-PIN 2700K	G4	2700	73	1.5	66	38	Ø16	1/100
CLAG4L15CW	LED G4 BI-PIN 5000K	G4	5000	85	1.5	66	38	Ø16	1/100
CLAG4L3WW	LED G4 BI-PIN 2700K	G4	2700	50	0.9	60	33	15	1/100
CLAG4L3CW	LED G4 BI-PIN 5000K	G4	5000	60	0.9	60	33	15	1/100

UPDATED ON 08.12.2016

