

# HIBTRI2

## LED Power Switchable TRI-CCT High Bay

IP65

5 YEAR  
REPLACEMENT  
WARRANTY




Sensor  
(Sold separately)

### Product Features:

- Input voltage range: 120-277V AC 50Hz
- Constant current LED driver inbuilt
- Housing & Faceplate: powder coated Aluminium
- Heatsink: Aluminium
- Diffuser: Clear PC
- LED chips: 2835 LED
- CRI: >70
- Power factor: 0.95
- Flex & plug: 1.2m
- Ambient temp: -20 to 50°C
- Suitable for dimming (1-10V dimmer only)
- Suitable for 2-way switching
- Suitable for use with motion & microwave sensors
- **Plug in PIR sensor for HIBTRI2 available (sold separately)**



**TRI-POWER  
TRI-CCT  
ALL IN ONE**

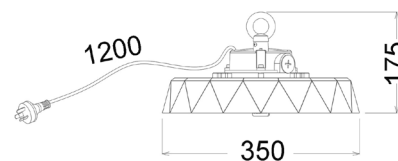

PART NO.			HIBTRI2	HIBSENSOR	
LUMENS	100W	3000K	16500LM	Sensor Type	PIR
		4000K	17500LM	Wattage	<0.5W
		5700K	17000LM	Installation Height	Recommended up to 12m
	150W	3000K	23250LM	Detection Angle	120°
		4000K	25500LM	Time Delay	5s / 1min / 5min / 10min
		5700K	24000LM	Ambient Temperature	-20 to 60°C
	200W	3000K	30000LM	Stand by Dim Level Setup	0%, 10%, 20%, 30%
		4000K	32000LM	UV Resistant	Yes
		5700K	31000LM	Ambient Light	day and night
POWER FACTOR			0.95		
DIMENSIONS			Ø350 X H175mm		
BOX WEIGHT			3.6kg		
BOX DIMENSIONS			370x370x145cm		
CARTON QTY			1/1		

\*Must be installed by a licenced electrician (Installation instructions sheet provided in each product box)