

LINEAL

Dimmable Interior LED Tri-CCT Vanity Wall Lights IP44

- Input voltage: 220-240V 50Hz
- Housing: Aluminium
- Mounting plate: iron
- Diffuser: Acrylic
- Tri-CCT (3000K / 4000K / 5700K) in one fitting
- CCT switch inside the fitting
- LED chips: SMD2835
- CRI: 80
- Power factor: 0.92
- Ambient temp: -20 to 50°C
- Suitable for dimming
- Suitable for 2 way switching
- Suitable for use with sensors



For Tested and Recommended Dimmers:

- CLA-Trailing Edge: LYNX; VELA
- Clipsal-Universal: 32E450UDM, 31E2PUDM
- Clipsal-Trailing Edge: 32ELEDM-WE; 32E450TM
- HPM-Trailing Edge: CAT250T, CAT400T
- Diginet-LED Smart: MEDM, MMDM/RT

*Please check with Licenced electrician for Min and Max dimmer load


*May be compatible with other untested dimmers



LINEAL1
(White)



LINEAL2
(Black)

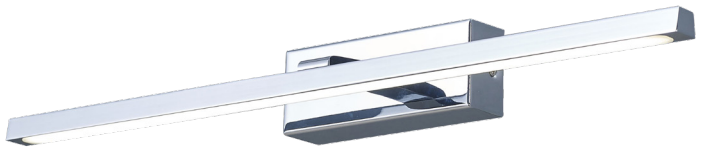


LINEAL3
(Chrome)




LINEAL4
(Antique Brass)


Each colour has 3 sizes

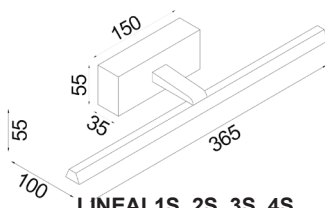

LINEAL1S, 2S, 3S, 4S

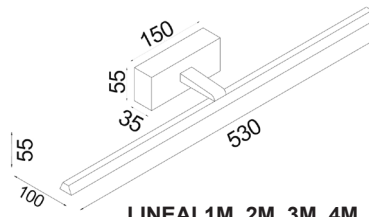

LINEAL1M, 2M, 3M, 4M

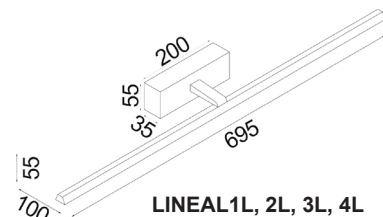

LINEAL1L, 2L, 3L, 4L

PART NO.	COLOUR	LUMENS			WATT	LENGTH	BASE	BOX SIZE	BOX WEIGHT	CARTON QTY
		3000K	4000K	5700K						
LINEAL1S	Powder coated White	740LM	762LM	652LM	8W	365mm	150x55mm	12x6x40cm	0.65kg	1/10
LINEAL1M		1090LM	1150LM	1000LM	12W	530mm	150x55mm	12x6x56cm	0.72kg	1/10
LINEAL1L		1320LM	1531LM	1305LM	16W	695mm	200x55mm	12x6x75cm	0.9kg	1/10
LINEAL2S	Powder coated Black	740LM	762LM	652LM	8W	365mm	150x55mm	12x6x40cm	0.65kg	1/10
LINEAL2M		1090LM	1150LM	1000LM	12W	530mm	150x55mm	12x6x56cm	0.72kg	1/10
LINEAL2L		1320LM	1531LM	1305LM	16W	695mm	200x55mm	12x6x75cm	0.9kg	1/10
LINEAL3S	Electroplated Chrome	740LM	762LM	652LM	8W	365mm	150x55mm	12x6x40cm	0.65kg	1/10
LINEAL3M		1090LM	1150LM	1000LM	12W	530mm	150x55mm	12x6x56cm	0.72kg	1/10
LINEAL3L		1320LM	1531LM	1305LM	16W	695mm	200x55mm	12x6x75cm	0.9kg	1/10
LINEAL4S	Electroplated Antique Brass	740LM	762LM	652LM	8W	365mm	150x55mm	12x6x40cm	0.65kg	1/10
LINEAL4M		1090LM	1150LM	1000LM	12W	530mm	150x55mm	12x6x56cm	0.72kg	1/10
LINEAL4L		1320LM	1531LM	1305LM	16W	695mm	200x55mm	12x6x75cm	0.9kg	1/10

*Must be installed by a licenced electrician (Installation instructions sheet provided in each product box)