

T8 LED TRI-CCT TUBES (2FT, 4FT & 5FT)


Globes - LED Globes





CCT Switch on the end

LED Starter Incl.



- Input voltage: 220-240V 50/60Hz
- Inbuilt Constant Current LED driver
- Heatsink: PC
- LED chips: SMD2835 LEDs
- Tri-CCT (3000K/ 4000K/ 5700K) in one fitting
- CCT switch on the end of the tube
- **LED starter included**
- Tube base: G13
- CRI: >80
- Power factor: >0.5
- Ambient temperature: -20 to 40°C
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with sensors
- Double insulated

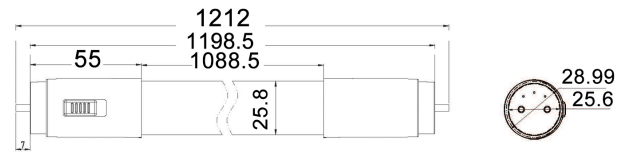


PT8TRI1 Line Drawings

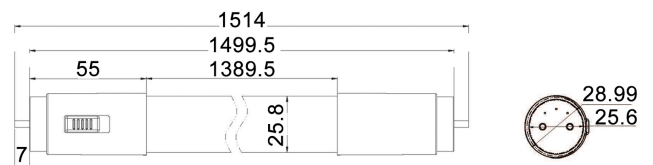

PT8TRI2 Line Drawings

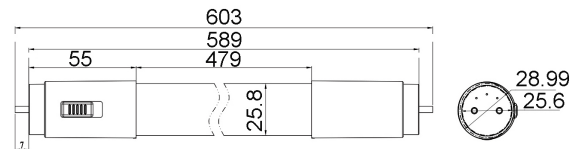

PT8TRI3 Line Drawings




25,000hr
Lifetime


150°
Beam Angle

IP20
Rated


2YEAR
Replacement Warranty

| PART NO. | DESCRIPTION | LUMENS | | | WATT | CRI | PF | LENGTH | BOX WEIGHT | BOX SIZE | CARTON QTY |
|----------|-------------------------------|--------|--------|--------|------|-----|------|--------|------------|-------------|------------|
| | | 3000K | 4000K | 5700K | | | | | | | |
| PT8TRI1 | GLOBE LED T8 TUBE TRI 18W 4FT | 1800lm | 2050lm | 1900lm | 18W | >80 | >0.5 | 1212mm | 0.13kg | 124x27x18cm | 1/40 |
| PT8TRI2 | GLOBE LED T8 TUBE TRI 24W 5FT | 2400lm | 2700lm | 2550lm | 24W | >80 | >0.5 | 1514mm | 0.16kg | 154x27x18cm | 1/40 |
| PT8TRI3 | GLOBE LED T8 TUBE TRI 9W 2FT | 900lm | 1000lm | 900lm | 9W | >80 | >0.5 | 603mm | 0.095kg | 66x3x3cm | 1/40 |

*Must be installed by a licenced electrician (Installation instructions sheet provided in each product box)