


R7 LED Globes

- LED R7S globes
- Input Voltage range: 220-240V
- Diffuser: clear glass
- Housing: glass & ceramic
- Heatsink: glass
- LED chips: 1 COB LED
- CRI: >80
- Power factor: >0.5
- Ambient temperature: -20 to 50°C
- Not suitable for dimming
- Suitable for 2 way switching
- Suitable for use with sensors

25,000hr Lifetime	360° Beam Angle	IP20 Rated	2YEAR Replacement Warranty
-------------------	-----------------	----------------------	--------------------------------------

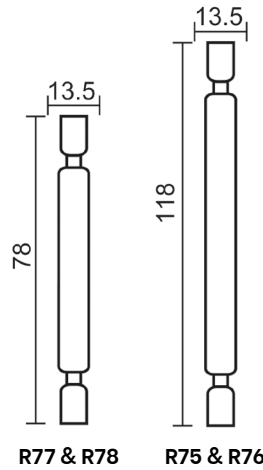

Globes - LED

Part No.	Description	Base	Kelvin	Lumens	Watt	CRI	Dimensions	Weight	Box	Carton QTY
R75	GLOBE LED R7 118mm 8W 3000K	R7	3000K	1000LM	8W	80	Ø13.5x118mm	0.03kg	2x2x13cm	1/500
R76	GLOBE LED R7 118mm 8W 5000K	R7	5000K	1000LM	8W	80	Ø13.5x118mm	0.03kg	2x2x13cm	1/500
R77	GLOBE LED R7 78mm 4W 3000K	R7	3000K	400LM	4W	80	Ø13.5x78mm	0.02kg	2x2x9cm	1/500
R78	GLOBE LED R7 78mm 4W 5000K	R7	5000K	400LM	4W	80	Ø13.5x78mm	0.02kg	2x2x9cm	1/500

