


Surface Mounted ceiling lights

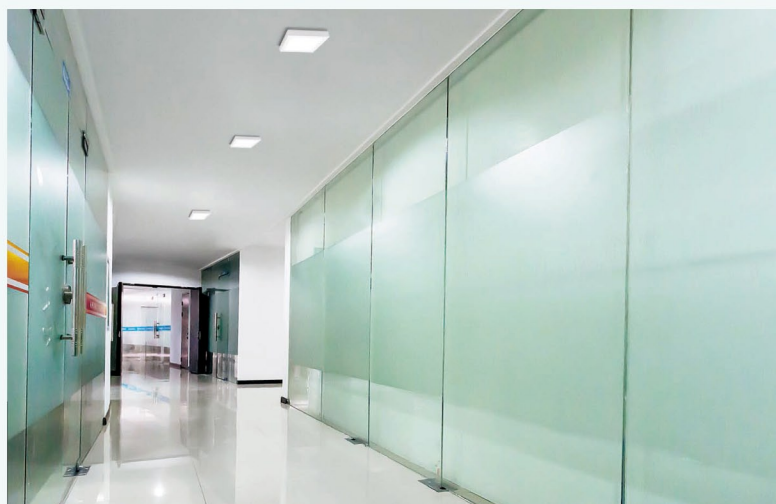

PRODUCT FEATURES

- Input voltage: 240V AC 50/60Hz
- Wattage: 6W, 12W & 18W
- SMD2835 LED chips
- Power factor: 0.9
- Life time: 30,000hrs
- PC body, PMMA frosted diffuser
- 12V DC constant current driver inbuilt

- Not suitable for dimming
- Matt white finish
- Designed in Australia
- Large terminal holes for easy connection
- Ambient temperature: -20 to 40°C
- IP20 for indoor use
- 3 year replacement warranty



DOUBLE INSULATED

CODE	DESCRIPTION	KELVIN	LUMENS (LM)	WATT (W)	CRI	BEAM (°)	DIAM. (mm)	DEPTH (mm)	CARTON QTY
SURFACE1	6W LED WH FIXED RND 3000K	3000K	450	6	82	160	Ø120	40	1/40
SURFACE3	18W LED WH FIXED RND 3000K	3000K	1450	18	82	160	Ø225	40	1/20
SURFACE4	6W LED WH FIXED RND 5000K	5000K	480	6	82	160	Ø120	40	1/40
SURFACE5	12W LED WH FIXED RND 5000K	5000K	960	12	82	160	Ø178	40	1/20
SURFACE6	18W LED WH FIXED RND 5000K	5000K	1550	18	82	160	Ø225	40	1/20
SURFACE7	6W LED WH FIXED SQ 3000K	3000K	450	6	82	160	120x120	40	1/40
SURFACE8	12W LED WH FIXED SQ 3000K	3000K	900	12	82	160	178x178	40	1/20
SURFACE9	18W LED WHT FIXED SQ 3000K	3000K	1450	18	82	160	225x225	40	1/20
SURFACE10	6W LED WHT FIXED SQ 5000K	5000K	480	6	82	160	120x120	40	1/40
SURFACE11	12W LED WHT FIXED SQ 5000K	5000K	960	12	82	160	178x178	40	1/20
SURFACE12	18W LED WHT FIXED SQ 5000K	5000K	1550	18	82	160	225x225	40	1/20

UPDATED ON 20.03.2017

