




## SYDNEYG2

LED Interior Surface Mounted Wall Light

- Input voltage: 220-240V AC 50/60Hz
- Inbuilt constant current LED driver included
- Driver output voltage: 12-22V
- Driver input current: 0.11A
- Driver output current: 0.3A
- Power factor: 0.5
- Material: aluminium electroplated s/nickel & acrylic
- Ambient Temp: -20 to 50°C (The life of the lamp will gradually reduce if used outside these temperature parameters)
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR & Microwave sensors

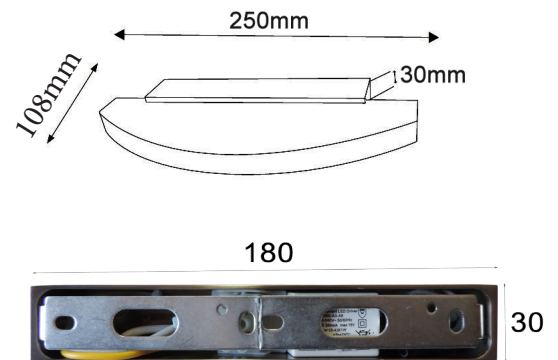

### Back Plate

Depth: 35mm  
Mounting U Bracket: 170x18mm  
with 2x20mm cable entry holes 35mm  
from each other



PART NO.	KELVIN (K)	LUMENS (LM)	Lumious Efficiency (lm/W)	WATT (W)	LEDs	CRI	WEIGHT (Kg)	BOX (cm)	CARTON QTY
SYDNEYG2	3000	460	71	6	36pcs 2835	≥80	0.69	17.3x11x5	12

Brochure updated on 11.05.2018