


Tel: 02 9938 7100 | Fax: 02 9938 7115

TOREN

LED Tri-CCT Surface Mount Garden Bollard Light IP65



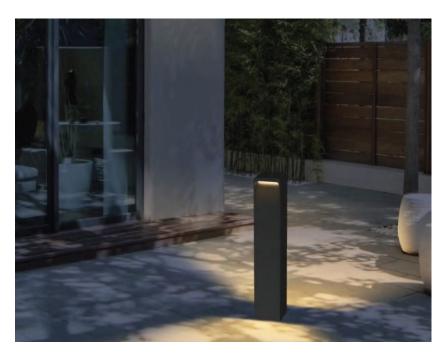

• Inbuilt Constant Current LED driver

• Housing: powder coated Aluminium

• Diffuser: clear PC

• Mounting plate: Aluminium

• LED chips: 24pcs 2835 SMD

• Tri-CCT (3000K/ 4000K/ 6500K) in one fitting

• CCT switch inside the fitting

• CRI: >80

• Power factor: >0.8

• Ambient temperature: -20 to 50°C

• Not suitable for dimming

• Suitable for 2 way switching


• Suitable for use with sensor












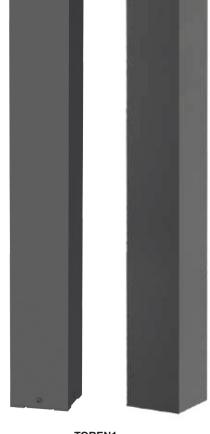

TOREN1

Part No.	Description	Lumens			Watt	Dimensions	PF	Box	Вох	Carton
		3000K	4000K	6500K			- •	Weight	Size	Qty
TOREN1	LED Tri Bollard Light IP65	214M	236LM	211LM	13W	H800xW90xD90mm	0.8	2.0kg	10x10x82cm	1/4

^{*}To avoid disappointment and warranty problems, please ensure the IP rating of the chosen product is relevant for the intended use.

- To maintain the IP rating please use circular cable in junction
- For parallel and single connection we recommend using an appropriate IP68 connector (CLA connector recommended).

^{*}These bollards are designed for mounting on a solid surface such as a concrete path or sturdy timber decking

^{*}Must be installed by a licenced electrician (Installation instructions sheet provided in each product box)