

### Features


- Inchangeable drivers
- High efficiency SMD LED chips
- Opal polycarbonate diffuser
- 300mm Flex
- 5 year warranty

### Applications

Commercial, Industrial,  
Shops, Gyms, Offices

### Warranty

5 years

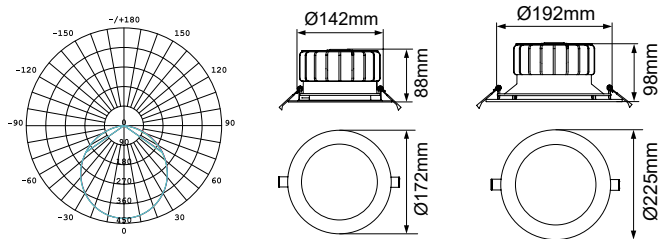

### Product Data

Order Code	Part No.	Wattage*	CCT	Lumen Output	Beam Angle	Size (ØxH)mm	Cutout Size	Weight (kg)
263005ND	263005ND	12~8W	3K / 4K / 5K	1200~800Lm	110°	Ø172x88	Ø150mm	0.60
263006ND	263006ND	25~18W	3K / 4K / 5K	2300~1800Lm	110°	Ø172x88	Ø150mm	0.60
263007ND	263007ND	12~8W	3K / 4K / 5K	1200~800Lm	110°	Ø225x98	Ø200mm	0.69
263008ND	263008ND	25~18W	3K / 4K / 5K	2300~1800Lm	110°	Ø225x98	Ø200mm	0.69

[1] Operating temperature: -20°C~+40°C

[2] Voltage: 220-240V

[3] PF: 0.9

[4] Multi-Watt via driver



Specifications are for reference only and may be changed without prior notice.