

Features



- Tri-Colour
- Dual-Watt
- Opal polycarbonate diffuser
- Large 6mm terminal block
- Fully approved to AS2293 standards

Applications

Offices, Garages, Stations,
Industrial, Car parks

Warranty

5 years (Fitting) 3 years (Battery)

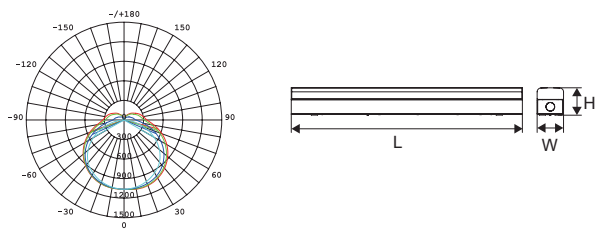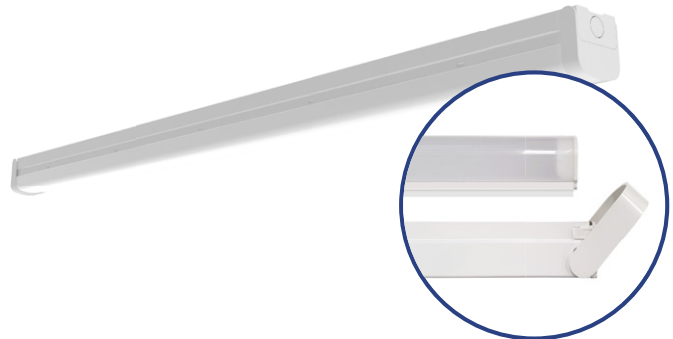

Product Data

Order Code	Part No.	Wattage	CCT	Lumen Output	Beam Angle	Size (LxWxH)mm	Weight (kg)
211043EM	211043EM	20 / 40W	3K / 4K / 5.7K	2000 / 4000Lm	120°	1200x64x65	1.1

[1] Operating temperature: -20°C~+45°C

[2] Voltage: 220-240V

[3] PF: 0.9

Luminaire Classifications		Maximum Spacings (M)														
		Mounting Height (M)														
		2.1	2.4	2.7	3	3.3	3.6	4	4.5	5	6	7	8	9	10	15
C0-C180	D63	19.4	20.3	21.1	21.8	22.4	23.0	23.7	24.5	25.2	26.4	27.4	28.1	28.6	28.9	28.0
C90-C270	D32	15.4	16.1	16.7	17.2	17.6	18.0	18.5	19.1	19.5	20.2	20.6	20.7	20.6	20.3	14.6



Specifications are for reference only and may be changed without prior notice.