


SUMMARY

The Plastial G3 Mini is a high performing downlight ideal for commercial and residential applications. Engineered to deliver high lumen efficacy up to 100Lm/W, this downlight features Tri-Colour Selectable technology, giving installers a choice of 3 colour temperatures within 1 fitting for individual preference or application requirements. Incorporating an integrated dimmable driver, the Plastial G3 Mini is rated to IC-4 allowing it to be safely installed under ceiling insulation.

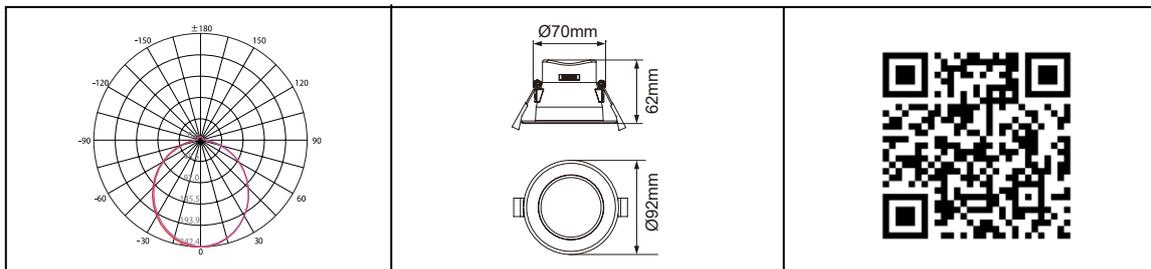

PRODUCT DATA

| | |
|------------------------|--|
| Order Code | 171013 |
| Voltage | 220-240V |
| Wattage | 7W |
| Lumen Output 3K | 600Lm |
| Lumen Output 4K & 5.7K | 700Lm |
| CCT | Tri-Colour Selectable - 3K / 4K / 5.7K |
| IP Rating | IP44 |
| IC Rating | IC-4 |
| Beam Angle | 100° |
| Light Source | SMD Chips |
| Driver | Integrated |
| Dimmable | Yes. Leading or Trailing Edge, Universal (Refer to Dimmer Compatibility List) |
| Connection | 1.2 flex & plug |
| Fitting Type | Recessed |
| Cutout Size | Ø70mm |
| Construction | Polycarbonate body / opal polycarbonate diffuser |
| Fitting Colour | White |
| PF | 0.9 |
| Net Weight (kg) | 0.20 |
| Lifetime L70B50 | 35,000 hours |
| Warranty | 5 years |

