


Proline Aluminium LED Pendants


- Single pendant light
- Aluminium finish
- Dedicated LED Driver
- 120° beam angle
- Cable length: 2000mm Adjustable
- IP Rating: IP20
- Indoor use only

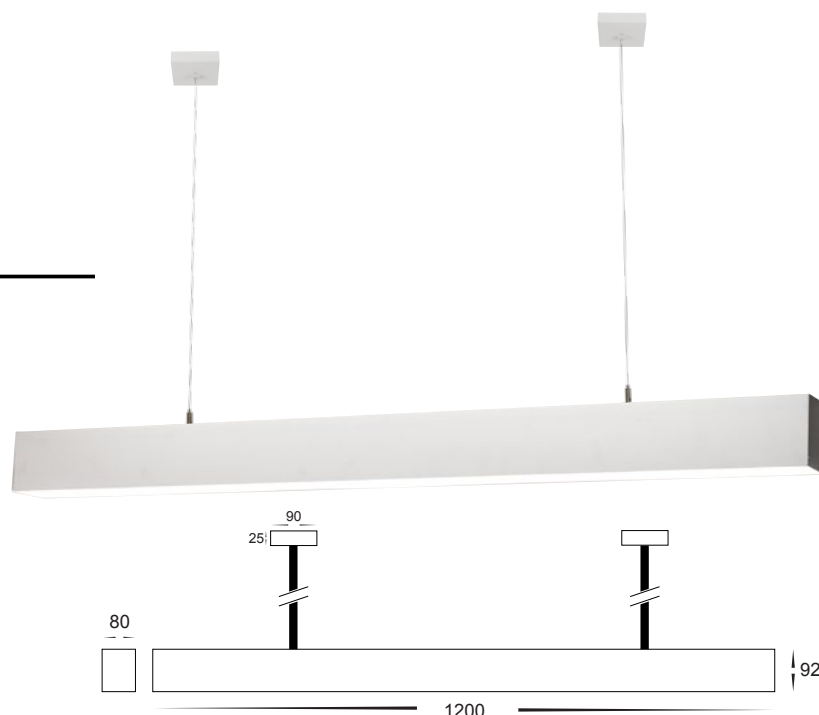

PART NUMBER	COLOUR TEMP	OUTPUT	POWER	INCLUDED GLOBES
HV6002C	Cool white, 6000k	5500lm	240v LED 55w	Built-in 55w LED
HV6002W	Warm white, 3000k	4950lm	240v LED 55w	Built-in 55w LED

Proline Black LED Pendants

- Single pendant light
- Aluminium black finish
- Dedicated LED Driver
- 120° beam angle
- Cable length: 2000mm Adjustable
- IP Rating: IP20
- Indoor use only

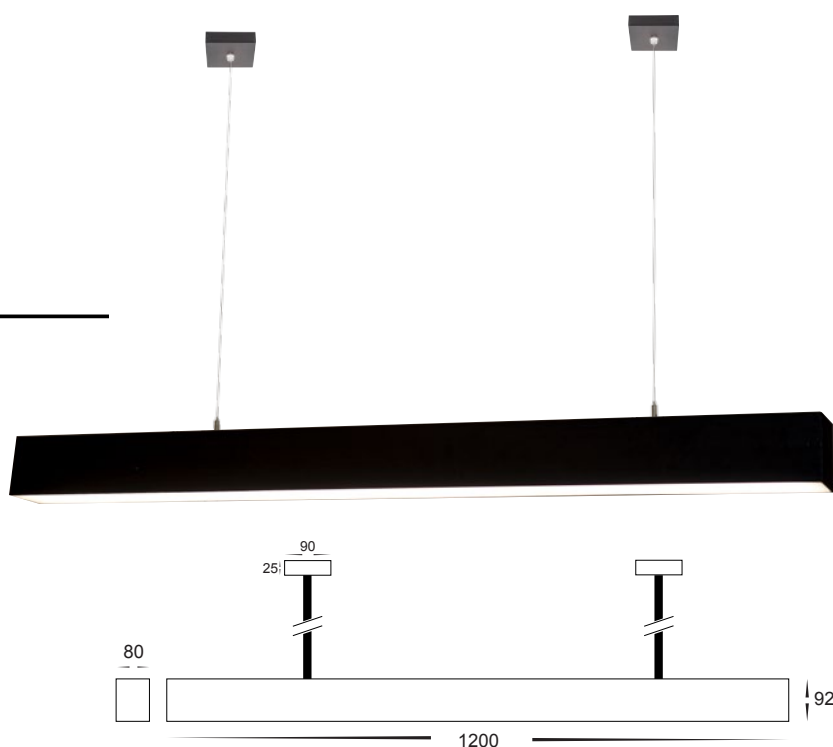

PART NUMBER	COLOUR TEMP	OUTPUT	POWER	INCLUDED GLOBES
HV6002C-BLK	Cool white, 6000k	5500lm	240v LED 55w	Built-in 55w LED
HV6002W-BLK	Warm white, 3000k	4950lm	240v LED 55w	Built-in 55w LED

All low voltage products that specify LED or are supplied with a 12v DC LED globe must be used with a suitable LED driver, refer to pages (185 - 206)
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to pages (257 - 258)