


PPL1301BK PPL1301BZ PPL2301WB

MATERIAL / FEATURES

- Heavy Duty Cast Aluminium/Brass
- Powder Coated Reflective White Under Shade
- Industrial Grade Hub Assembly includes:
 - Rugged "O" Ring Seal for added moisture protection
 - Frosted Glass or Clear Lens
 - High Grade Cast Shatter Shield: Protects against accidental injury
- Always straight design ensures Shades are always level on Posts
- Weather Resistant Powder Coat finish – Aluminium
 - (BK) Black – PPL1301BK
 - (BZ) Commercial Bronze – PPL1301BZ
- Chemically Aged finish – Brass
 - (WB) – Weathered Brass – PPL2301WB
 - WB Brass finish will patina / tarnish depending on environmental conditions

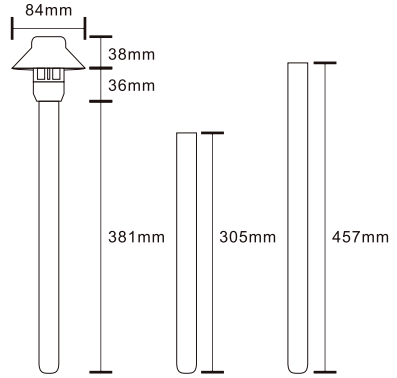

SPECIFICATIONS

- 12 Volt Fixture
- 3' - #18/2 Direct Bury Landscape Lighting Wire
- Hi-temp ceramic socket w/nickel contacts, stainless steel springs, and Teflon jacketed wire leads
- Post Heights: 305mm/381mm/457mm
- Globe required: G4 35W Max
- IP Rating: IP65



| PART NUMBER | Colour | Post Height | COLOUR TEMP | LUMENS | INPUT | INCLUDED LED |
|------------------------------|------------------|---------------|-------------|--------|-----------|----------------------------|
| PPL1301BK-12/15/18 | Black | 305/381/457mm | | | | No globes supplied |
| PPL1301BZ-12/15/18 | Bronze | 305/381/457mm | | | | No globes supplied |
| PPL2301WB-12/15/18 | Weathered Bronze | 305/381/457mm | | | | No globes supplied |
| PPL1301BK/BZ-12/15/18-PLV3G4 | Black/Bronze | 305/381/457mm | 2700K | 230 | 12V AC/DC | 3.5W G4 Bi Pin PLV3-G4-27K |
| PPL2301WB-12/15/18-PLV3G4 | Weathered Bronze | 305/381/457mm | 2700K | 230 | 12V AC/DC | 3.5W G4 Bi Pin PLV3-G4-27K |