



UFO III SHB27/100 - 200

100 - 200 watt IP65 LED low profile highbay.

Application

Super low profile LED highbay, ideal for commercial or industrial warehouse applications

Design Specifications

- Integral (non-dimmable) control gear with 4KV surge protection, choice of 100, 150 or 200 watt models
- Slimline, low profile die-cast aluminium body profile
- IP65/IK06 design protection, tempered glass diffuser
- High efficiency LED optics, with an impressive > 118 lm/W
- CRI > 80, 120 degree beam distribution
- Plug and play flex and plug included for faster installation



Technical Specification

| Product | Model No. | Input Voltage (V/AC) | Power (W) | Lumens (lm) | Beam Angle (°) | CCT (K) |
|---------|--------------|----------------------|-----------|-------------|----------------|---------|
| | SHB27/100NDL | 240 | 100 | 12000 | 120 | 5000 |
| | SHB27/150NDL | 240 | 150 | 17700 | 120 | 5000 |
| | SHB27/200NDL | 240 | 200 | 24000 | 120 | 5000 |
| | SHB25/120PLB | | | | | |


| CRI | Body Colour | Diameter (mm) | Dim (mm) | Mass (kg) |
|-----|-------------|---------------|----------|-----------|
| 80 | BLACK | 303 | 81(H) | 1.61 |
| 80 | BLACK | 303 | 91(H) | 2 |
| 80 | BLACK | 303 | 101(H) | 2.29 |
| | BLACK | | | |

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with SAL Terms and Conditions of sale and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all


IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

SHB27/150

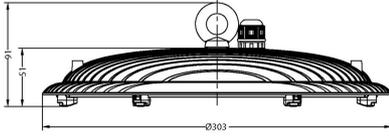

SHB27/200

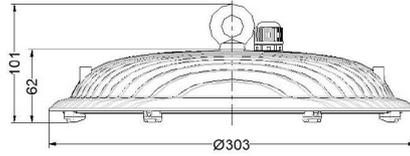

THE NEW ESS106 IS SMALL IN SIZE BUT BIG ON FEATURES.



For more
information
please
scan me

