

Last modification

2024-04-11

KUDO PE15-BK
9329501072035



The Kudo pendant light presents a minimalist yet chic aesthetic, boasting a petite cylindrical-shaped shade crafted from sturdy iron. Available in striking black or pristine white, each pendant is adorned with a lavish gold baffle, exuding sophistication. Designed with versatility in mind, the canopy features a 360-degree swivel joint, ensuring compatibility with raked ceilings. Ideal for contemporary interiors, the Kudo pendant seamlessly blends functionality with elegance, providing ambient illumination and serving as a stylish focal point for any room.

Overview

Family name	Kudo
Categories	Pendants
Mounting	Surface
Shade Shape	Cylinder
Suspension Type	Rod (1x300)+(2x600)
Usage	Indoor Lighting

Color / Material

Fixture Color	Black, Gold
Fixture Finish	Sand
Fixture Material	Iron

Size

Fixture Diameter (cm)	6.0
Fixture Height (cm)	15.0
Canopy Diameter (cm)	10.0
Canopy Projection (cm)	2.5
Shade Diameter (cm)	6.0
Shade Height (cm)	15.0
Suspension Length (cm)	150.0
Height Adjustable?	Yes

Specification

Voltage Input	240V
Total Wattage (max)	6


All representations within this document are subject to copyright. ELECTRICAL INSTALLATIONS MUST BE PERFORMED BY A QUALIFIED ELECTRICAL CONTRACTOR AND INSTALLED IN ACCORDANCE WITH AS/NZS 3000.
NOTE : All images , descriptions and dimensions are indicative. Please check latest version of item detail on Telbix website prior to ordering or installation.

Globe Type	GU10
Globe / Light Source qty	1
Globe / Light Source included	No
Dimmable	Globe Dependant
Electrical Protection	CLASS I - HIGH VOLTAGE, EARTH REQUIRED
IP rating	IP20
Lead and Plug	No
Approvals	RCM
Assembly Required	Yes
Box Contents	Basic mounting screws, Instruction
Installation Required	Yes (by Licensed Electrician only)
Care Instructions	Do not use strong liquid cleaners, Wipe clean with a dry cloth
Replacement Warranty	*3 Years

Barcode

GTIN 9329501072035

Image -dimensions

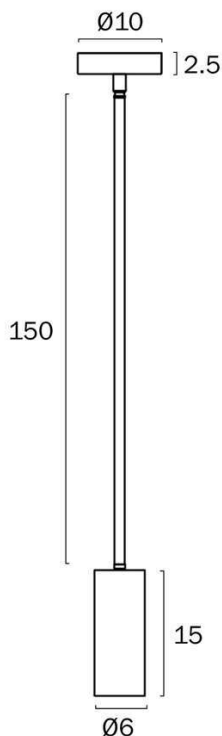

Note: Dimensions are only a guide and may vary due to manufacturing variations.