# **Data Sheet**



Last modification

2024-01-23

## MASTO WB1-WH83 9329501068250



Introducing the Masto Wall Light – a harmonious fusion of style and durability. With its sleek aluminium construction and an impressive IP54 rating, this luminaire is designed to thrive in both indoor and outdoor environments. The integrated LED technology ensures energy efficiency and a long-lasting glow, while the sand finish adds a touch of sophistication.

Featuring a warm colour temperature of 3000K, the Masto Wall Light creates a welcoming atmosphere wherever it illuminates. Available in both black and white colour options as well as a one light or two light fitting, this versatile fixture effortlessly complements any aesthetic.

#### **Overview**

Family name Masto
Categories Wall Lights
Mounting Surface

**Usage** Indoor Lighting, Outdoor Lighting

**ERAC Product Registration** GMA-511662

#### Color / Material

Fixture Color White
Fixture Finish Sand
Fixture Material Aluminium

## Size

Fixture Width (cm) 5.0

Fixture Height (cm) 50.0

Fixture Projection (cm) 5.5

Canopy Width (cm) 5.0

Canopy Height 14.0

Height Adjustable? No

### <u>Specification</u>

1

Voltage Input 240V Total Wattage (max) 8

Globe Type LED integrated SMD

All representations within this document are subject to copyright.ELECTRICAL INSTALLATIONS MUST BE PERFORMED BY A QUALIFIED ELECTRICAL CONTRACTOR AND INSTALLED IN ACCORDANCE WITH AS/NZS 3000.

NOTE: All images, descriptions and dimensions are indicative. Please check latest version of item detail on Telbix website prior to ordering or installation.

# **Data Sheet**



Globe / Light Source qty 1
Globe / Light Source included Yes
Lumens 360

Color TemperatureWarm WhiteColor Kelvin3000kColor Rendering>80DimmableNo

**Electrical Protection** CLASS I - HIGH VOLTAGE, EARTH REQUIRED

IP rating IP54
Lead and Plug No
Approvals RCM
Assembly Required No

**Installation Required** Yes (by Licensed Electrician only)

Care Instructions Aluminium, Brass and Stainless Steel will naturally oxidised and change overtime. Exterior products require

regular four (4) monthly cleaning and maintenance to ensure they do not accumulate dirt or other

environmental deposits. Wipe the product with a mild detergent and warm water to remove surface deposits.

Rinse with fresh water and wipe dry with a soft cloth. An extra temporary protection barrier of water

displacement oil can help to maintain the surface, such as WD40, sprayed onto a soft cloth and rubbed onto the

surface., Do not use strong liquid cleaners, Wipe clean with a dry cloth


Replacement Warranty

\*3 Years

<u>Barcode</u>

**GTIN** 9329501068250

### **Image -dimensions**

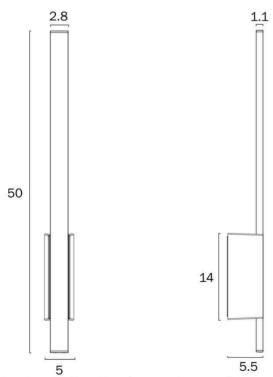

Note: Dimensions are only a guide and may vary due to manufacturing variations.

All representations within this document are subject to copyright.ELECTRICAL INSTALLATIONS MUST BE PERFORMED BY A QUALIFIED ELECTRICAL CONTRACTOR AND INSTALLED IN ACCORDANCE WITH AS/NZS 3000.

NOTE: All images, descriptions and dimensions are indicative. Please check latest version of item detail on Telbix website prior to ordering or installation.

