

Last modification 2024-01-23

MASTO WB2-BK83
9329501068267



Introducing the Masto Wall Light – a harmonious fusion of style and durability. With its sleek aluminium construction and an impressive IP54 rating, this luminaire is designed to thrive in both indoor and outdoor environments. The integrated LED technology ensures energy efficiency and a long-lasting glow, while the sand finish adds a touch of sophistication.

Featuring a warm colour temperature of 3000K, the Masto Wall Light creates a welcoming atmosphere wherever it illuminates. Available in both black and white colour options as well as a one light or two light fitting, this versatile fixture effortlessly complements any aesthetic.

Overview

Family name	Masto
Categories	Wall Lights
Mounting	Surface
Usage	Indoor Lighting, Outdoor Lighting
ERAC Product Registration	GMA-511662

Color / Material

Fixture Color	Black
Fixture Finish	Sand
Fixture Material	Aluminium

Size

Fixture Width (cm)	9.0
Fixture Height (cm)	61.6
Fixture Projection (cm)	6.5
Canopy Width (cm)	9.0
Canopy Height	12.0
Height Adjustable?	No

Specification

Voltage Input	240V
Total Wattage (max)	16
Wattage	8


All representations within this document are subject to copyright. ELECTRICAL INSTALLATIONS MUST BE PERFORMED BY A QUALIFIED ELECTRICAL CONTRACTOR AND INSTALLED IN ACCORDANCE WITH AS/NZS 3000.
NOTE : All images , descriptions and dimensions are indicative. Please check latest version of item detail on Telbix website prior to ordering or installation.

Globe Type	LED integrated SMD
Globe / Light Source qty	2
Globe / Light Source included	Yes
Lumens	720
Color Temperature	Warm White
Color Kelvin	3000k
Color Rendering	>80
Dimmable	No
Electrical Protection	CLASS I - HIGH VOLTAGE, EARTH REQUIRED
IP rating	IP54
Lead and Plug	No
Approvals	RCM
Assembly Required	No
Installation Required	Yes (by Licensed Electrician only)
Care Instructions	Aluminium, Brass and Stainless Steel will naturally oxidised and change overtime. Exterior products require regular four (4) monthly cleaning and maintenance to ensure they do not accumulate dirt or other environmental deposits. Wipe the product with a mild detergent and warm water to remove surface deposits. Rinse with fresh water and wipe dry with a soft cloth. An extra temporary protection barrier of water displacement oil can help to maintain the surface, such as WD40, sprayed onto a soft cloth and rubbed onto the surface., Do not use strong liquid cleaners, Wipe clean with a dry cloth
Replacement Warranty	*3 Years

Barcode

GTIN 9329501068267

Image -dimensions

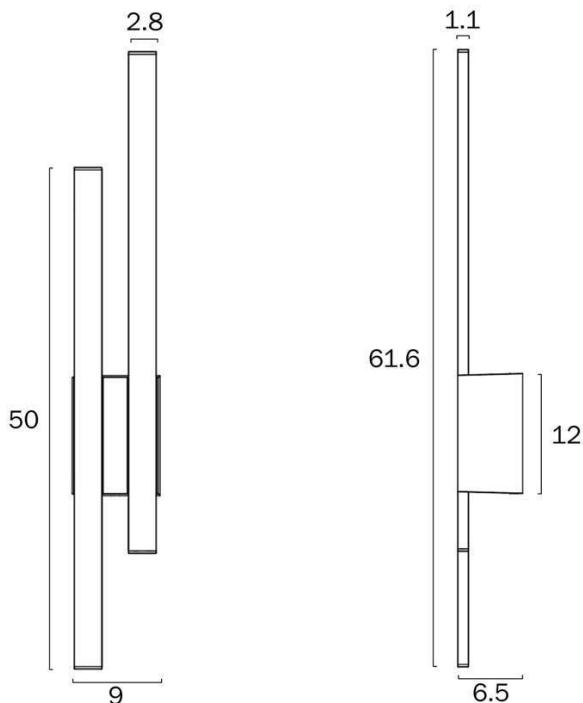

Note: Dimensions are only a guide and may vary due to manufacturing variations.

