


MANUS 24V MR16 EXTERIOR POST SPIKE LIGHT

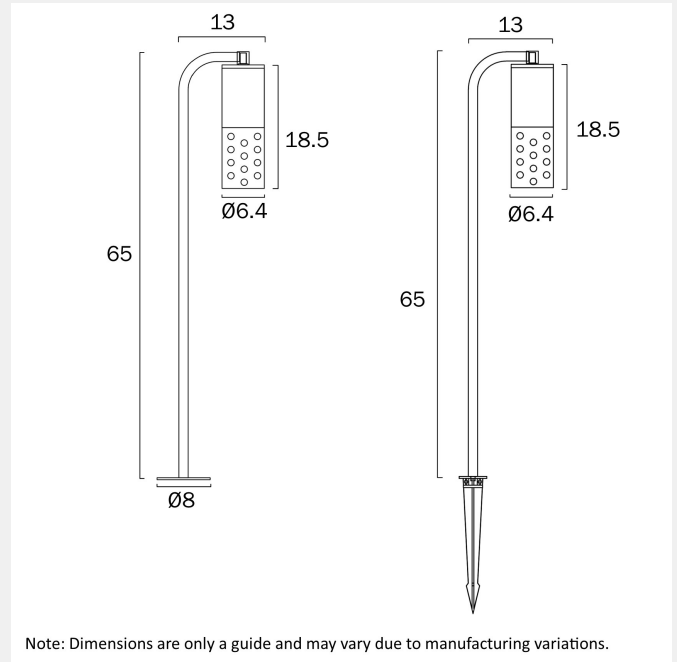

Note: Dimensions are only a guide and may vary due to manufacturing variations.

LIGHT SOURCE

Voltage Input

24V

Total Wattage (max)

5

Globe Type

MR16

Globe / Light Source qty

1

Globe / Light Source included

Yes

Color Kelvin

2700K

Color Temperature

Warm White

Dimmable

No

Lumens

400

CRI (Color Rendering Index)

>90

SPECIFICATIONS

Lead and Plug

No

IP rating

IP65

Electrical Protection

CLASS III - LOW VOLTAGE, <54v

Mounting

Surface

Height Adjustable?

No

Switch

No

COLOUR AND MATERIAL

Fixture Material

Aluminium

Diffuser Material

Polycarbonate

PRODUCT DIMENSIONS

Fixture Weight (Kg)

0.63

Fixture Height (cm)

65

Cable Length (cm)

100

WARRANTY

Replacement Warranty

*3 Years

CARE

Care Instructions

Do not use strong liquid cleaners. Wipe clean with a dry cloth. Aluminium, Brass and Stainless Steel will naturally oxidise and change overtime. Exterior products require regular four (4) monthly cleaning and maintenance to ensure they do not accumulate dirt or other environmental deposits. Wipe the product with a mild detergent and warm water to remove surface deposits. Rinse with fresh water and wipe dry with a soft cloth. An extra temporary protection barrier of water displacement oil can help to maintain the surface, such as WD40, sprayed onto a soft cloth and rubbed onto the surface.

VARIANTS

[MANUS PT-BK24] MANUS 24V
MR16 EXTERIOR POST SPIKE
LIGHT (BLACK)



9329501084014

[MANUS PT-GN24] MANUS
24V MR16 EXTERIOR POST
SPIKE LIGHT (GREEN)



9329501084038

[MANUS PT-RST24] MANUS
24V MR16 EXTERIOR POST
SPIKE LIGHT (CORTEN)



9329501084021

Find MANUS 24V MR16 EXTERIOR POST SPIKE LIGHT on
www.telbix.com

