
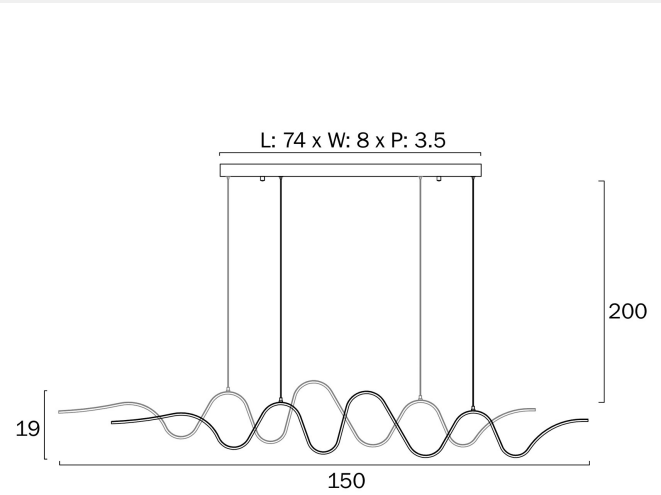


OSELIA LINEAR PENDANT LIGHT

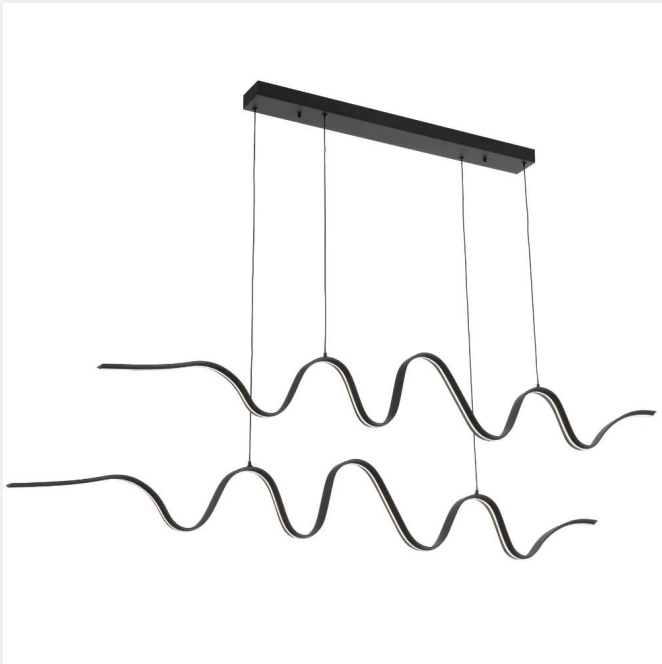

Note: Dimensions are only a guide and may vary due to manufacturing variations.

LIGHT SOURCE

- Voltage Input
240
- Total Wattage (max)
46
- Globe Type
LED integrated SMD
- Globe / Light Source qty
0
- Globe / Light Source included
Yes
- Color Kelvin
3000k
- Color Temperature
Warm White
- Dimmable
No
- Lumens
2560
- CRI (Color Rendering Index)
>90

Surge Protection (Yes/No)
0

SPECIFICATIONS

- Lead and Plug
No
- IP rating
IP20
- Suspension Type
Cable
- Height Adjustable?
Yes
- Raked Ceiling Compatible
0
- Mounting
Surface
- Electrical Protection
CLASS I – HIGH VOLTAGE, EARTH REQUIRED
- Control Gear Included
0

COLOUR AND MATERIAL

- Fixture Material
- 0
- Fixture Pantone Color
- 0
- Glass Color
- 0
- Diffuser Material
- 0

WARRANTY

Replacement Warranty

*3 Years

PRODUCT DIMENSIONS

- Fixture Weight (Kg)
- 0
- Fixture Height (cm)
- 19
- Fixture Length (cm)
- 150
- Fixture Width (cm)
- 0
- Suspension Length (cm)
- 200

OTHER

Additional Functions

0

CARE

Care Instructions

Do not use strong liquid cleaners. Wipe clean with a dry cloth. Aluminium, Brass and Stainless Steel will naturally oxidise and change overtime. Exterior products require regular four (4) monthly cleaning and maintenance to ensure they do not accumulate dirt or other environmental deposits. Wipe the product with a mild detergent and warm water to remove surface deposits. Rinse with fresh water and wipe dry with a soft cloth. An extra temporary protection barrier of water displacement oil can help to maintain the surface, such as WD40, sprayed onto a soft cloth and rubbed onto the surface.

VARIANTS

[OSELIA PE-BK] OSELIA LINEAR PENDANT LIGHT (BLACK)	 9329501084564
[OSELIA PE-WH] OSELIA LINEAR PENDANT LIGHT (WHITE)	 9329501084571

Find OSELIA LINEAR PENDANT LIGHT on
www.telbix.com

