
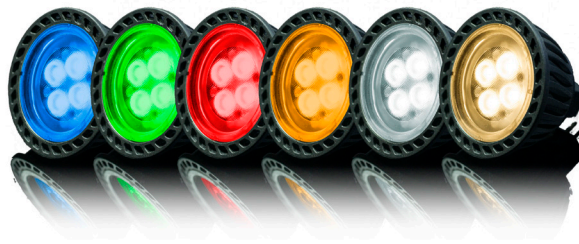


Aqualux LED Globes

A complete range designed for landscape lighting

Features


- True MR16 GX5.3 Form, Fits most MR16 / GX5.3 Luminaires.
- 4W High-Power LED technology, thermally optimised for enclosed fittings.
- 3000K / 5700K / Amber / Red / Green / Blue for Lighting design flexibility.
- 12 ~ 24V AC/DC MultiVoltage™ for ultimate installation flexibility.
- New ultra-spot 10D model for highlighting columns, trees and features.



AGL-250 / 4W

38°


POWER	4.0W
LUMINOUS FLUX	250lms
BEAM ANGLE	38° FWHM
LUMINOUS INTENSITY	560 cd
EFFICACY	62.5 lms / W
CCT	3000K
CRI	83 Ra
LED	SSC 3030
LIFETIME	30,000 Hours
VOLTAGE	12V ~ 24V AC / DC
BASE	GX5.3
DIMENSIONS	MR16 50 X 47 MM



AGL-550 / 6W

10°

POWER	6W (5.7W hot @ 24VDC)
LUMINOUS FLUX	550lms nom. (525lms hot)
BEAM ANGLE	36° FWHM
LUMINOUS INT.	780 cd
EFFICACY	92 lms / W (hot)
CCT	3000K
CRI	82 Ra
LED	Nichia
LIFETIME L70	25,000 Hours
VOLTAGE	12V ~ 24V AC / DC
BASE	GX5.3
DIMENSIONS	MR16 50 X 47 MM



AGL-250-30X38 / 4W 38° ILLUMINANCE PLOT




HEIGHT (M)	BEAM SPREAD (M)	CENTER BEAM (LUX)
1	0.7	596 lx
2	1.3	149 lx
3	2.0	66 lx
4	2.6	37 lx
5	3.3	23 lx
6	3.9	17 lx

AGL-250-30X10 / 4W 10° ILLUMINANCE PLOT

HEIGHT (M)	BEAM SPREAD (M)	CENTER BEAM (LUX)
1	0.2	2571 lx
2	0.4	642 lx
3	0.6	285 lx
4	0.8	160 lx
5	1.0	102 lx
6	1.2	71 lx

AGL-550-30X36 / 6W 38° ILLUMINANCE PLOT

HEIGHT (M)	BEAM SPREAD (M)	CENTER BEAM (LUX)
1	0.7	865 lx
2	1.4	216 lx
3	2.1	96 lx
4	2.8	54 lx
5	3.5	34 lx
6	4.2	24 lx



AGL-250-30X38
3000K / 38° / 250LM / 4W

AGL-250-55X30
5500K / 38° / 250LM / 4W

AGL-250-30X10
3000K / 10° / 235LM / 4W

RED 627NM / 38° / 4W
GREEN 530NM / 38° / 4W
BLUE 470NM / 38° / 4W
AMBER 590NM / 38° / 4W