

Condor Spot

12W Security Spot IP65

- Weatherproof IP65 rating
- Three different selectable colour temperatures
- Large terminals for easy installation
- Built and designed for increased reliability
- Up to 20% higher Lumen output compared to previous versions



ORDERING INFORMATION

Order code	13959
Description	12W Security Spot IP65 Black
Driver Power	12 W
Driver Type	Fixed output
Item Code	CONDOR SPOT-13959

EFFICIENCIES

Total System Efficiency	108 lm/W
--------------------------------	----------

The performance of each component of a luminaire is demonstrated through its efficiencies, which together determine the total system efficiency of the product. The output of the LED chip is first multiplied by the optical and thermal efficiencies to calculate the Luminaire efficiency. However, this calculation does not consider the driver efficiency. To determine the overall efficiency of the system, the Luminaire efficiency must be multiplied by the driver efficiency, which accounts for all losses in the system.

MECHANICAL

Adjustability	Gimbal
Body Material	Diecast Aluminium
Diffuser Material	Tempered Glass
Product Finish	Powdercoated
Fitting Colour	Black
Installation Type	Surface mount
IP Rating	IP65

ELECTRICAL

Electrical Rating	Class I
Input Current	0.12 A
Input Frequency	50 Hz
Input voltage	230Vac
In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6%	
Maximum Wattage	12 W
Power Factor	0.5
Working Temp Range	-10 to 40 °C

LAMP

Macadam Steps (SDCM)	6-step MacAdam Ellipse
Beam Angle	90 °
CCT Configuration	TRI-CCT
Colour Rendering Index (CRI)	>80
LED Type	COB

LED LIFETIME

LED Lifetime	50000 hrs
This is the Reported LED Lifetime in Hours based on TM-21. Atom does not list the projected or calculated LED lifetime, which is normally longer as TM-21 Addendum B explicitly states "The Calculated and Projected Lp(Dk) are not to be reported". This Lifetime refers to the life of a single LED however the system life is longer since the probability and binomial distribution of all LEDs in the system means that the average led is performing above the specification and compensates for the LEDs falling below.	
LED Lifetime Rating	L70B10

COLOUR TEMPERATURE

11 Watts

Warm White (3000 K)	1100 lm
Cool White (4000 K)	1300 lm
DayLight (5000 K)	1250 lm

DRIVER

Dimmable	No
Driver Included	Yes
Integrated Driver	Yes
Driver Mode	Constant Current
Driver Type	Fixed output
Wiring Type	Re-wireable terminal block (3 pin)

COMPLIANCE

Standards	AS/NZS 60598.1 AS/NZS 60598.2.1 AS/NZS 61347.1 AS/NZS 61347.2.13 AS CISPR 15
------------------	--

WARRANTY

Domestic Use Warranty	3 RTB (Total 3 Years)
VIP Warranty	2 Onsite, 3 RTB (Total 5 Years)


VIP warranty is available to registered users and is subjected to additional terms and conditions.

DIMENSIONS


Product Height	167 mm
Product Length	182 mm
Product Weight	505 g
Product Width	121 mm

PHOTOMETRICS

CONDOR SPOT/13959/TRI/5000K

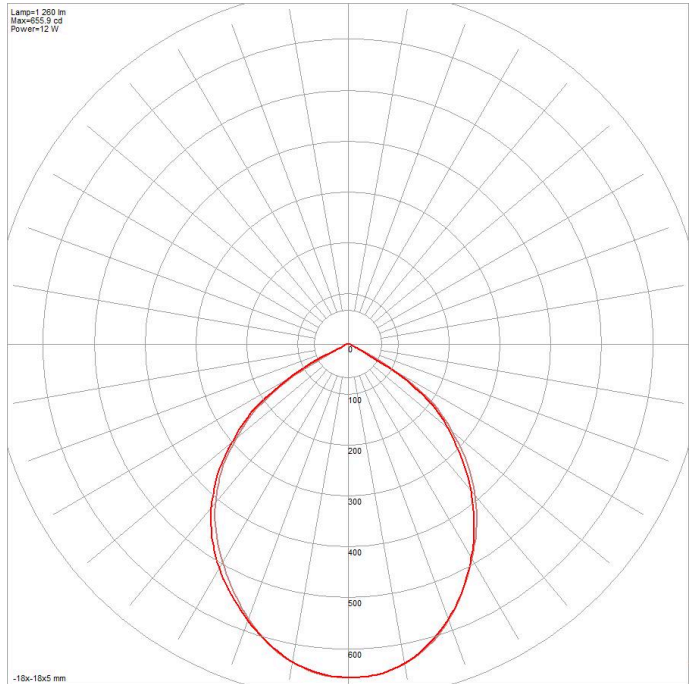

CONDOR SPOT/13959/TRI/4000K

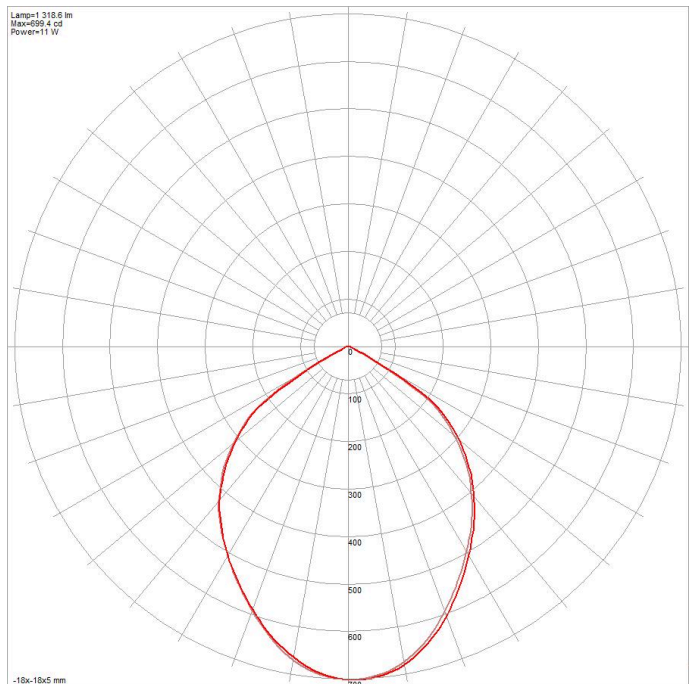

CONDOR SPOT/13959/TRI/3000K

