

Condor Sensor

13W Security Spot W/Sensor IP54

- Weatherproof IP54 rating
- Three different selectable colour temperatures
- Large terminals for easy installation
- 230V 300W relay output
- 3 year warranty



ORDERING INFORMATION

Order code	13962
Description	13W Security Spot W/Sensor IP54 White
Driver Power	12 W
Driver Type	Fixed output
Item Code	CONDOR SENSOR-13962

EFFICIENCIES

Total System Efficiency 100 lm/W

The performance of each component of a luminaire is demonstrated through its efficiencies, which together determine the total system efficiency of the product. The output of the LED chip is first multiplied by the optical and thermal efficiencies to calculate the Luminaire efficiency. However, this calculation does not consider the driver efficiency. To determine the overall efficiency of the system, the Luminaire efficiency must be multiplied by the driver efficiency, which accounts for all losses in the system.

MECHANICAL

Adjustability	Gimbal
Body Material	Diecast Aluminium
Diffuser Material	Tempered Glass
Product Finish	Powdercoated
Fitting Colour	White
Installation Type	Surface mount
IP Rating	IP54

ELECTRICAL

Electrical Rating	Class I
Input Current	0.12 A
Input Frequency	50 Hz
Input voltage	230Vac
In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6%	
Maximum Wattage	13 W
Power Factor	0.5
Working Temp Range	-10 to 40 °C

LAMP

Macadam Steps (SDCM)	6-step MacAdam Ellipse
Beam Angle	90 °
CCT Configuration	TRI-CCT
Colour Rendering Index (CRI)	>80
LED Type	COB

LED LIFETIME

LED Lifetime	50000 hrs
This is the Reported LED Lifetime in Hours based on TM-21. Atom does not list the projected or calculated LED lifetime, which is normally longer as TM-21 Addendum B explicitly states "The Calculated and Projected Lp(Dk) are not to be reported". This Lifetime refers to the life of a single LED however the system life is longer since the probability and binomial distribution of all LEDs in the system means that the average led is performing above the specification and compensates for the LEDs falling below.	
LED Lifetime Rating	L70B10

COLOUR TEMPERATURE

11 Watts

Warm White (3000 K)	1100 lm
Cool White (4000 K)	1300 lm
DayLight (5000 K)	1250 lm

DRIVER

Dimmable	No
Driver Included	Yes
Integrated Driver	Yes
Driver Mode	Constant Current
Driver Type	Fixed output

SENSOR (S SUFFIX)

Detection Range	10 m
Lux Range	10 to 1000 lx
Sensor Type	PIR
Switched Output	Yes
Switched Output Rating	300 W
Time Delay	12

COMPLIANCE

Standards	AS/NZS 60598.1 AS/NZS 60598.2.1 AS/NZS 61347.1 AS/NZS 61347.2.13 AS CISPR 15
------------------	--

WARRANTY

Domestic Use Warranty	3 RTB (Total 3 Years)
VIP Warranty	2 Onsite, 3 RTB (Total 5 Years)


VIP warranty is available to registered users and is subjected to additional terms and conditions.

DIMENSIONS


Product Height	251 mm
Product Length	182 mm
Product Weight	610 g
Product Width	121 mm

PHOTOMETRICS

CONDOR SENSOR/13961/TRI/4000K

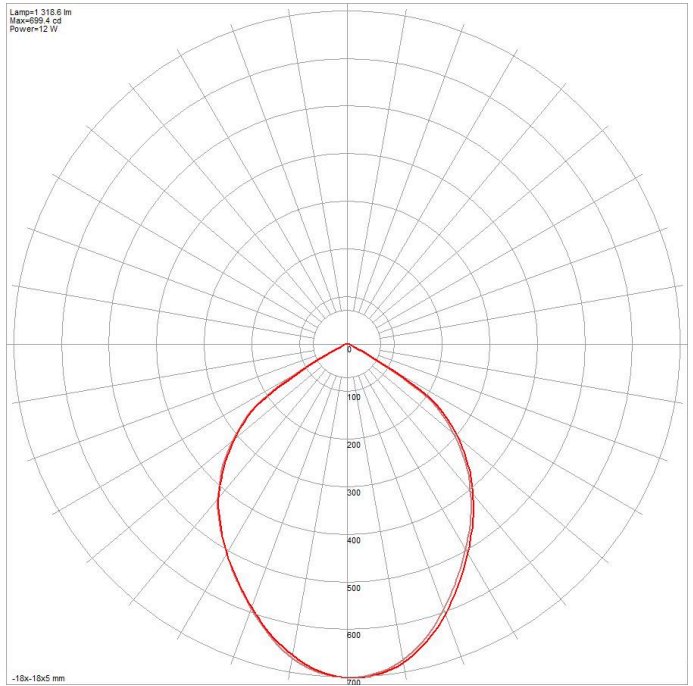

CONDOR SENSOR/13961/TRI/3000K

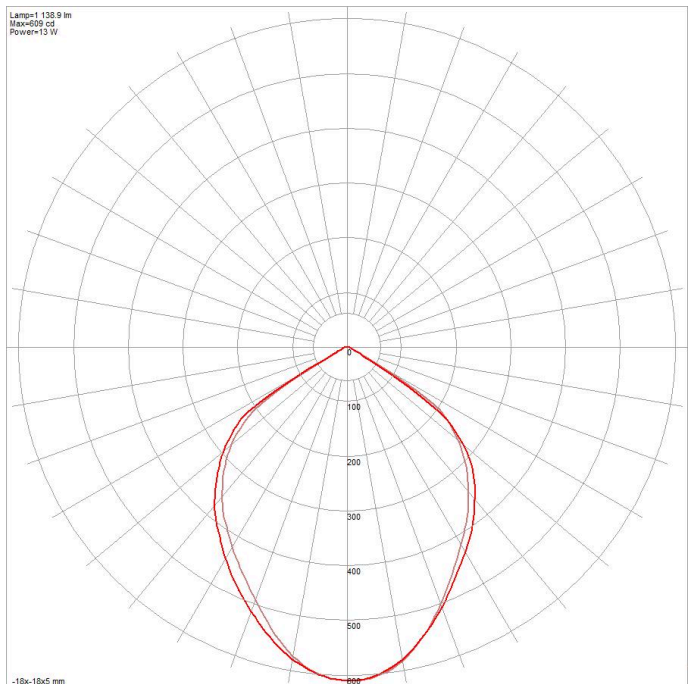

CONDOR SENSOR/13961/TRI/5000K

