

ENDURA **EMERGENCY**

Tri-Proof Dual Wattage CCT LED Batten



The Endura Emergency Tri-Proof Dual Wattage CCT LED Batten is a one box solution for multi-purpose commercial or industrial utility applications.

Supplied with Vandal-proof screws and IK08 impact rated.

- Designed to provide high levels of illumination under adverse conditions.
- Compliant with AS/NZS 2293
- Robust construction to maintain maximum light output and lamp life.
- Large terminal blocks and cable entry.
- Stainless Steel locking clips for water tight seal.
- Easy selectable colour changing temperature (CCT) with an inbuilt switch 3000°K, 4200°K & 6000°K.
- Designed for quick and easy installation and maintenance.
- Dual-Power Selectable (Through DIP switch):
 - 60cm: 12W/20W
 - 120cm 22W/40W
- Max Lumen:
 - at 20W 60cm: 2200lm (4200K)
 - at 40W 120cm: 4200lm (4200K)
- This Tri-Proof batten has impact, corrosion and weather resistant body.
 - IP66 Weatherproof Rating
 - IK08 Impact Rating
- Vandal-proof screws included
- 220-240V AC 50Hz
- 3 year warranty

APPLICATIONS

- Office and school lighting: office room, meeting room, class room.
- Commercial lighting: shopping mall, super market, retailer shops.
- Workshop and garage.





ENDURA EMERGENCY

Tri-Proof Dual Wattage CCT LED Batten

LED BATTEN


TECHNICAL SPECIFICATIONS

Operating Voltage	220-240V / 50Hz
Class	Class I (1)
Wattage	20W / 40W Switchable
Lumens	2200/4200 Lumen max
Colour Temperature	3000°K (Warm white) 4200°K (Cool White) 6000°K (Daylight)
Power/Lumens/CCT (22754 60CM)	20W 2000lm 3000°K 20W 2200lm 4200°K 20W 2100lm 6000°K
Power/Lumens/CCT (22756 120CM)	40W 3800lm 3000°K 40W 4200lm 4200°K 40W 4000lm 6000°K
Beam Angle	120 degrees
Colour Rendering Index	≥80
Power Factor	≥0.9
Dimmable	No
Rated Lifetime	30,000hrs @40°C Ambient
Construction	Polycarbonate (frame & diffuser)
Ingress protection	IP66
Operating Temperature	TA: 25°C
Warranty	3 year replacement
Standards	AS/NZS 60598.1 AS/NZS 60598.2.2 CISPR15




INSTALLATION

Must be installed by a Licensed Electrician

Wiring Diagram

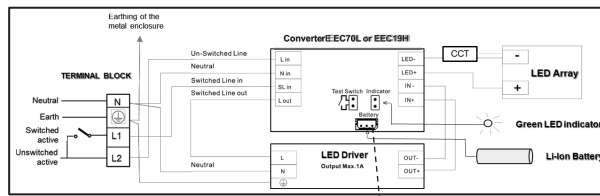

Model No.	Battery Type	Battery Capacity	Emergency Power	Full Charger Time	Emergency Duration
22754	LiFeP04 18650	3.2V 6.4Wh	1.5W	24h	3h
22756	LiFeP04 18650	3.2V 9.6Wh	2.5W	24h	3h

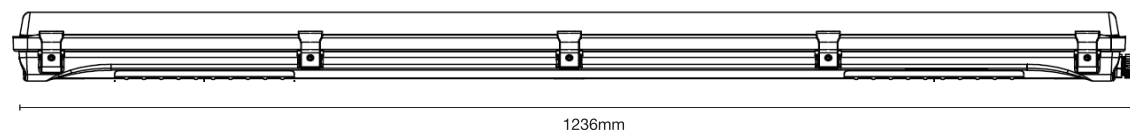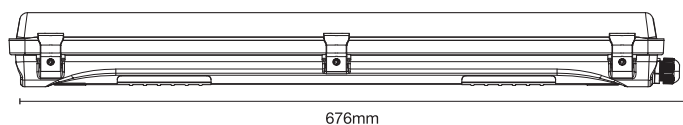

	COLOUR	DESCRIPTION	BOX SIZE	GROSS WEIGHT	BOX QTY
22754/08					
RETAIL BOX	Grey	ENDURA 60CM Tri-Proof CCT LED Batten	W683 x H123 x D79 mm	1.2 kg	1 pc
OUTER CTN	Grey	ENDURA 60CM Tri-Proof CCT LED Batten	W700 x H386 x D333 mm	17.6 kg	12 pc
22756/08					
RETAIL BOX	Grey	ENDURA 120CM Tri-Proof CCT LED Batten	W1243 x H123 x D79 mm	2.25 kg	1 pc
OUTER CTN	Grey	ENDURA 120CM Tri-Proof CCT LED Batten	W1260 x H333 x D263 mm	19.1 kg	8 pc