



RF REMOTE CONTROL FOR INTERCONNECTED SMOKE / CO ALARMS - 22654/05

Before first using your new Smoke Alarm remote control, it is most important that you read and follow these instructions, even if you feel you are quite familiar with this type of product. Keep this document for future reference.


In an emergency of a fire dial 000(Australia only) dial 111(New Zealand Only)

MUST BE INSTALLED BY A LICENCED ELECTRICIAN

This is the portable wireless remote controller for your wireless interconnected smoke detectors. By pressing the "TEST" or "HUSH" buttons on the remote to communicate with your smoke detectors, ensuring an easier, quicker, more sensible operation with your smoke detectors. Direct control with your smoke alarm hereby you don't have to take a ladder to test the smoke detectors weekly or monthly. When there are un-wanted noise from the smoke alarm, press the "HUSH" button once, to make the smoke alarm silent.

Feature

- Wireless 433.92/868Mhz GFSK Connected.
Wire-free design.
- Easy for installation.
- Compact and portable, Hold it on the wall.
- Battery: 23A DC12V (Replaceable battery)
- Function: TEST/HUSH for Interconnected smoke detector
- Size: 110mm x 37mm x 14mm
- GW: 0.095KG

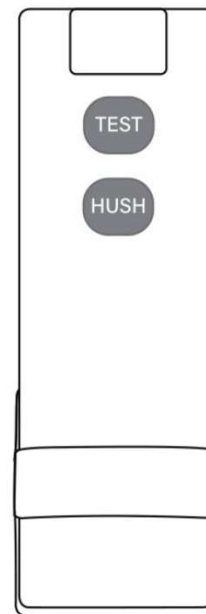



RF REMOTE CONTROL FOR INTERCONNECTED SMOKE / CO ALARMS - 22654/05

PAIRING OPERATION:

SMOKE ALARM:

1. Press and hold the button for any products, after the green light flashes three times, release it . At this time, the red-light flashes for one minute and waits for the other products to be paired. If you need to end the pairing in advance, press the button again.
2. After the previous step, press and hold the button for the products to be paired. After the green light flashes twice, release it If the pairing is successful, it flashes three times. If the products has been paired with other networks before, it will exit after three long-time flashes after press-and-holding.

CLEAR MATCH

1. Press and Hold the button and wait for the green light to flash for 4 times, release it, wait for the green light to flash for 3 times, and clear successfully.
2. If the network is cleared successfully, flash 3 times and exit. Otherwise, repeat the above steps to clear.

REMOTE CONTROLLER:

1. After pairing the smoke alarm. Perform the same process with the remote controller.
2. Press and hold the button for the smoke alarm, after the green light flashes three times, release it. At this time, the red-light flashes for one minute and waits for the other products to be paired.
3. Choose the remote controller to be paired with the smoke alarm. Press the "TEST" button on the remote controller. If pairing is successful, the Red LED on the remote will flash twice.

Remarks:

- Hush function works ONLY when detectors triggers, means detect the real fire. DO not try to hush when detectors are just under testing.
- Detectors will sound 10-15seconds when detectors are under testing. DO NOT Press any button on the detector or Remote controller During this time. Just waiting about 15 second.
- Test the smoke alarm MONTHLY.



RF REMOTE CONTROL FOR INTERCONNECTED SMOKE / CO ALARMS - 22654/05

Warranty

Brilliant Lighting warrants this product against defects in manufacture and workmanship for a period of 1 year only for components a from date of purchase or as specified elsewhere. This warranty applies for this product use in a domestic and/or commercial applications. This warranty is only valid for products installed and operated within the guidelines specified by Brilliant Lighting and within the correct operating voltage ranges as stated on the product's rating label.

Warranty does not include damage or loss arising from incorrect installation, operation or maintenance of this product, damage caused through modification, incorrect installation, service by unqualified or unauthorised personnel or lack of regular maintenance and cleaning. Proof of installation by qualified personnel may be required, e.g. Electrical Safety Certificate. Proof of purchase must be supplied with all warranty claims.

This warranty is provided in addition to any other rights and remedies of the customer under any law. In applications not intended for household, personal or domestic use, liability is limited to replacement or reimbursement of product only. Brilliant Lighting does not warranty the costs of removal or re-installation of this product or associated components.

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if goods fail to be of acceptable quality and the failure does not amount to a major failure.

Any claim under this warranty must be made within the specified warranty period from date of purchase of this product. To make a claim under the warranty; at your own expense take the product (with proof of purchase – receipt or similar) to the store where you purchased the product or contact Brilliant Lighting at the address below.

This warranty is given by:

Brilliant Lighting (Aust) Pty. Ltd.
ABN 37 006 203 694
956 Stud Road Rowville, VIC 3178
Phone: 03 9765 2555
Email: warranty@brilliantlighting.com.au
MADE IN CHINA