

MONOLED LED DOWNLIGHT



An 8W dimmable LED fixed downlight with a high lumen output of over 850 lumens for the warm white and 880 lumens for the cool white. Both energy efficient and bright, it is a cost effective solution with outstanding performance.

- Perfect for new or retro-fit installations with a standard 90mm hole cut-out.
- Matt white housing with frost white diffuser
- Flush frame design for a seamless look.
- IP44 rated Front Fascia ONLY
- IC-4 & IC-F rated Can be safely covered and abutted to building insulation
- SAA approved with integrated LED driver

APPLICATIONS

Ideal for any residential or commercial interior space






MONOLED LED DOWNLIGHT

TECHNICAL SPECIFICATIONS					
Operating voltage:	240V / 50Hz				
Class:	Class II (2)				
Wattage:	8W Total				
Lumens:	21020: 880 Total lumens 21574: 850 Total lumens				
Colour temperature:	21020: 4200°K (Cool white) 21574: 3000°K (Warm white)				
Beam angle:	100 degrees				
Colour rendering index:	≥80				
Power factor:	≥0.8				
Dimmable:	Yes				
Rated lifetime:	30,000hrs @25°C Ambient (When covered with thermal insulation)				
Construction:	ABS, Aluminium and PC Diffuser				
Operating temperature:	TA: 25 degrees Celsius				
Warranty:	3 year replacement				
Standards:	AS/NZS 60598.1 AS/NZS 60598.2.2				

INSTALLATION

Must be installed by a licensed electrician



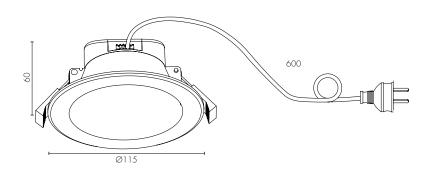

	MODEL	COLOUR	DESCRIPTION	BOX SIZE	GROSS WEIGHT	BOX QTY	BARCODE/TUN
RETAIL BOX	21020	White	Monoled LED 4200K Downlight	W120 x H75 x D120 mm	0.23 kg	1 pc	9 312641 210207 >
OUTER CTN	21020	White	Monoled LED 4200K Downlight	W385 x H175 x D635 mm	6.93 kg	30 pc	19312641210204
RETAIL BOX	21574	White	Monoled LED 3000K Downlight	W120 x H75 x D120 mm	0.23 kg	1 pc	9 312641 215745 >
OUTER CTN	21574	White	Monoled LED 3000K Downlight	W385 x H175 x D635 mm	6.93 kg	30 pc	19312641215742