

Thor Pro 15 TRK

LED Tracklight



Description

The THOR-PRO-15 LED Range features a family of products with different accessories to be accessible to so many lighting applications while maintaining the same design. Available in a recessed, surface mount and 3-Circuit Track Head Model, part of a matching family of 15W, 23W and 32W models. Ideal for product lighting in shops and displays or even for high-end residential applications. With a 62mm diameter cover and a slimline 170mm long housing made from powder-coated CNC Aluminium and using the latest LED COB Chip and Driver technology, the THOR-PRO-15 series offers stable, flicker-free, low-glare lighting. The added harmonic (flicker-free) filter will minimise and reduce the total harmonic distortion and therefore significantly reduce flicker and any potential strobing effects. Tri-Colour Switchable, 3000K Warm White, 4000K Neutral White and 5000K White colour temperature options. CRI90 for better colour rendition, great for highlighting artwork. Choose from White or Black body and baffle colour options. Available in 15°, 24°, 36° (standard), 45° and 60° Optical Reflector Lens options. Reduce glare with an optional honeycomb Lens, or add colour with Purple, Red, Blue, Green or Yellow Filter Lenses. Backed by a 5 Year Replacement Warranty.

Specification Features


Input Voltage:	240V		
Power (W):	15W		
IP rating (IP):	IP20		
Lumens (lm):	3000K	4000K	5000K
White	1200lm	1300lm	1250lm
Black	1150lm	1300lm	1250lm
LED type:	SMD		
CCT:	3000K - 4000K - 5000K (Switchable)		
CRI:	≥90		
Beam angle (°):	15°, 24°, 36°, 45° & 60° (36° Standard)		
Dimmable:	Yes*		
Lifespan (hrs):	50,000hrs		

*Fully dimmable with suitable dimmers.



Item No.	Variant		CCT
	Wht	Blk	
THOR-PRO-15-TRK	52516	52517	TRIO
THOR-PRO-15-BAF	52531	52532	N/A

Diagrams / Additional

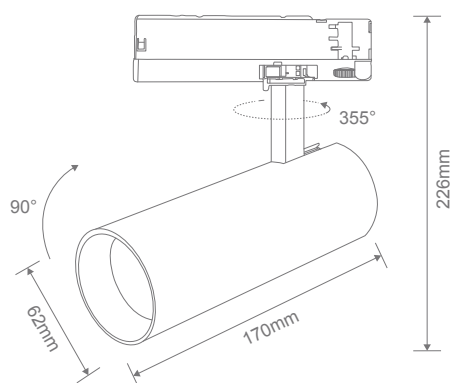

Item No.	Variant			
	60°	45°	24°	15°
THOR-PRO-15-REF	52519	52520	52521	52522



Item No.	Variant					
	Honeycomb	Purple	Red	Blue	Green	Yellow
THOR-PRO-15-LEN	52524	52525	52526	52527	52528	52529

