

NEO-PRO-13-SM















LED Surface Mounted Downlight

Description

The NEO-PRO range of LED downlights are the latest upgrade to the NEO Series, with improved functions such as TRIO Tricolour switchable technology as well as a higher IP Rating for wet areas. Designed to reduce glare as well as maintaining high performance in light output and energy consumption. LED recessed downlight with anti-glare deep set frame, frosted diffuser, and an integrated dimmable LED driver with flex & plug. Fully dimmable with suitable dimmers.

Now with TRIO, the added option of changing the colour temperature output of the downlight with a dip switch at the back of the fitting.

Specification Features

240V Input Voltage: Power (W): 13 **IP65** IP rating (IP):

Lumens (lm): Warm White 3000K - 1000lm

Neutral White 4000K - 1200lm

White 5700K - 1100lm

LED type: **SMD**

CCT: 3000K - 4000K - 5700K (Switchable)


CRI: Beam angle (°): 75° Dimmable: Yes*

50,000hrs Lifespan (hrs):

*Fully dimmable with suitable dimmers.



Diagrams / Additional

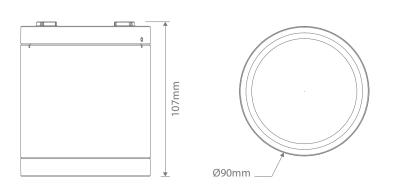

| Item No. | Variant | | CCT |
|---------------|---------|-------|------|
| | Wht | Blk | CCI |
| NEO-PRO-13-SM | 20891 | 20890 | TRIO |