NO UV/IR



NEO-PRO-25-SM LED Surface Mounted Downlight

Description

The NEO-PRO range of LED downlights are the latest upgrade to the NEO Series, with improved functions such as TRIO Tricolour switchable technology as well as a higher IP Rating for wet areas. Designed to reduce glare as well as maintaining high performance in light output and energy consumption. LED recessed downlight with anti-glare deep set frame, frosted diffuser, and an integrated dimmable LED driver with flex & plug. Fully dimmable with suitable dimmers.

Now with TRIO, the added option of changing the colour temperature output of the downlight with a dip switch at the back of the fitting.

Specification Features

Input Voltage:	240V			
Power (W):	25			
IP rating (IP):	IP65			
Lumens (lm):	Warm White 3000K - 2200lm			
	Neutral White 4000K - 2400lm			
	White 5700K - 2300lm			
LED type:	SMD			
CCT:	3000K - 4000K - 5700K (Switchable)			
CRI:	≥80			
Beam angle (°):	75°			
Dimmable:	Yes*			
Lifespan (hrs):	50,000hrs			
*Fully dimmable with suitable dimmers.				




ies

65

LED

ັ້(**3yr**

Diagrams / Additional

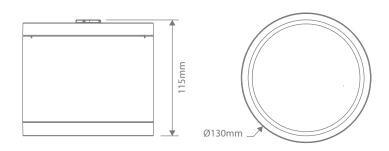

Item No.	Variant		CCT
item 140.	Wht	Blk	CCI
NEO-PRO-25-SM	20893	20892	TRIO

Domus 29-31 Richland Street. Kingsgrove NSW 2208 | Phone: (02) 9554 9600 | Fax: (02) 9554 9433 | email: enquiries@domuslighting.com.au Specification subject to change without prior notice.