

PLEX-COB-10


















COB True Dotless LED Strip

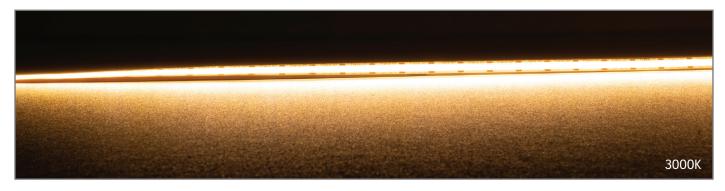

Description

The PLEX-COB series of LED strip incorporates the latest in LED COB chip technology, with true dotless appearance utilising 640 LEDs per metre. Operating on 24V DC allows for less resistive heat and longer run lengths. Choose from IP54 Indoor Strip including wet areas, or for waterproof installations, the IP67 Strip with silicon coating. Longer areas of weldless joints provide a more reliable solution avoiding breaks in continuity. A range of wattage per metre options from 5W, 10W, 15W and 20W covers all desirable light output levels for your desired area. High CRI90 chips provide excellent colour rendering while providing a smooth and seamless linear lighting for a clean and minimalistic look. The PLEX-COB series come with a choice of single colour 3000K Warm White, 4000K Neutral White and 5000K White for your residential or commercial linear lighting project applications. A comprehensive range of optional accessories including fast fix connectors, and L-joint connectors are available for complex installations. Ideal for kitchens, bathrooms, laundry, bars, restaurants, and all indoor highlighting applications.

Specification Features

24V DC Input Voltage: Per Metre Power (W): 10W IP54** IP rating (IP):

Per Metre Lumen Output (lm): Warm White 3000K - 900lm

Neutral White 4000K - 900lm

White 5000K - 1000lm

LED type: COB - 640 LED Per Metre CCT: 3000K - 4000K - 5000K

≥90 CRI: 180° Beam angle (°): Yes*** Dimmable: 50.000hrs Lifespan (hrs): Parallel Wiring: Cutting Increment/Sections: 25 mm

24V DC Constant Voltage LED Driver Requires:

- With the use of Domus drivers.
- All LED strip must be installed on an aluminium heat sink, failure to do so WILL VOID WARRANTY.
- ** Indoor Use Only Suitable for indoor wet areas
- ***Fully dimmable with suitable LED Driver and Dimmers











PLEX-COB-LCCON


PLEX-COB-LCON

PLEX-COB-SCON



PLEX-COB-FCCON

Diagrams / Additional



Item No.	Variant			CCT
	Per Mt	20M	50M	CCI
PLEX-COB-10	24003	24017	24031	3000K
	24004	24018	24032	4000K
	24005	24019	24033	5000K
Max Run Length: 5M				
	LCCON	LCON	SCON	FCCON
PLEX-COB	23991	23993	23990	23992