



Preston LED Coping Light


Name	Preston
Material	Solid Brass
Colour	Brass
IP Rating	IP65
Colour Temp	 3000k 4000k 5500k
IK Rating	IK10
Installation Type	Wall - Surface Mounted
Diffuser Type	Frosted Polycarbonate
Lamp Base	Built in LED
Max Wattage	2.5w, 5w, 7.5w
Protection Class	12v DC = 3 (No Earth Required)
Lamp Expectancy	<30,000hrs
CRI	CRI>80
Dimmable	Yes
Warranty	3 Years Replacement

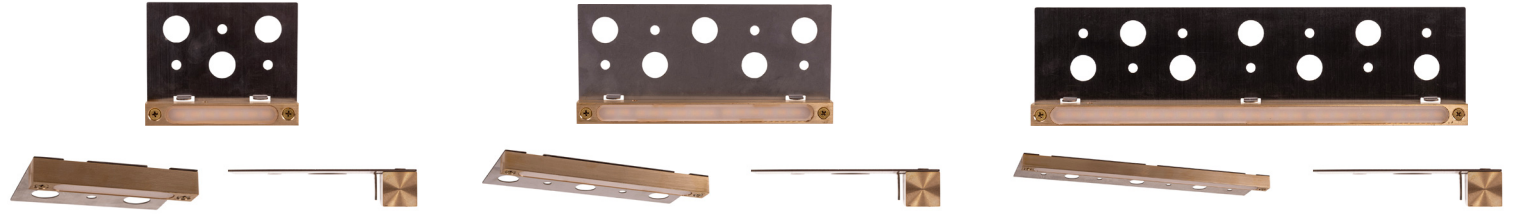


Dimensions for HV3297

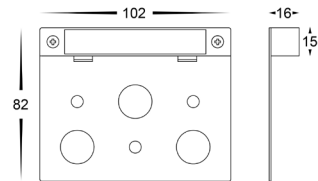



Dimensions for HV3298

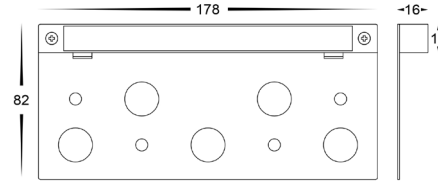

Dimensions for HV3299

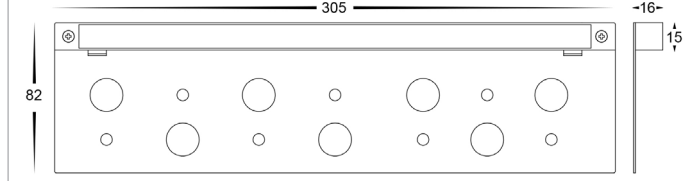

Solid Brass and Solid Copper fittings will naturally tarnish, Solid brass fittings with additional coatings (Antique Brass & Graphite) may tarnish through the coating when installed in outdoor environments.



Product Ordering

Image	Part Number	Colour Temp	Lumens	Input Voltage	Beam Angle	Included LED	Barcode
	HV3297T-BR-12V	 3000k 4000k 5500k	140lm 150lm 145lm	12V DC	100°	TRI Colour Built in 2.5w LED	9350418037121
	HV3298T-BR-12V		280lm 300lm 290lm			TRI Colour Built in 5w LED	9350418037152
	HV3299T-BR-12V		420lm 440lm 430lm			TRI Colour Built in 7.5w LED	9350418037183

Optional Havit Compatible Accessories

Image	Part Number	Description
	12v DC LED Drivers	See Catalogue or Website for full range of 12v DC LED Drivers
	HV9911	Small IP67 Weatherproof Connector
	HV9912	Medium IP67 Weatherproof Connector
	HV9913	Large IP67 Weatherproof Connector

