





Stor Aluminium Black

- Bunker wall lights
- Aluminium Poly Powder Coated Black
- IP Rating: IP54

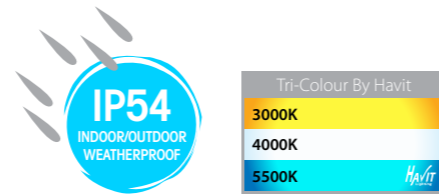

| IMAGE | PART NUMBER | COLOUR TEMP | LUMENS | INPUT | INCLUDED LED |
|-------|--------------------|-------------------------|----------------------------|-------|---------------------------------------|
| | HV3670T-BLK | 3000K 4000K 5500K | 2250lm 2325lm 2400lm | 240v | Tri-Colour Built-in 30w LED |
| IMAGE | PART NUMBER | COLOUR TEMP | LUMENS | INPUT | INCLUDED LED |
| | HV3671T-BLK | 3000K 4000K 5500K | 2050lm 2125lm 2250lm | 240v | Tri-Colour Built-in 30w LED |

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336

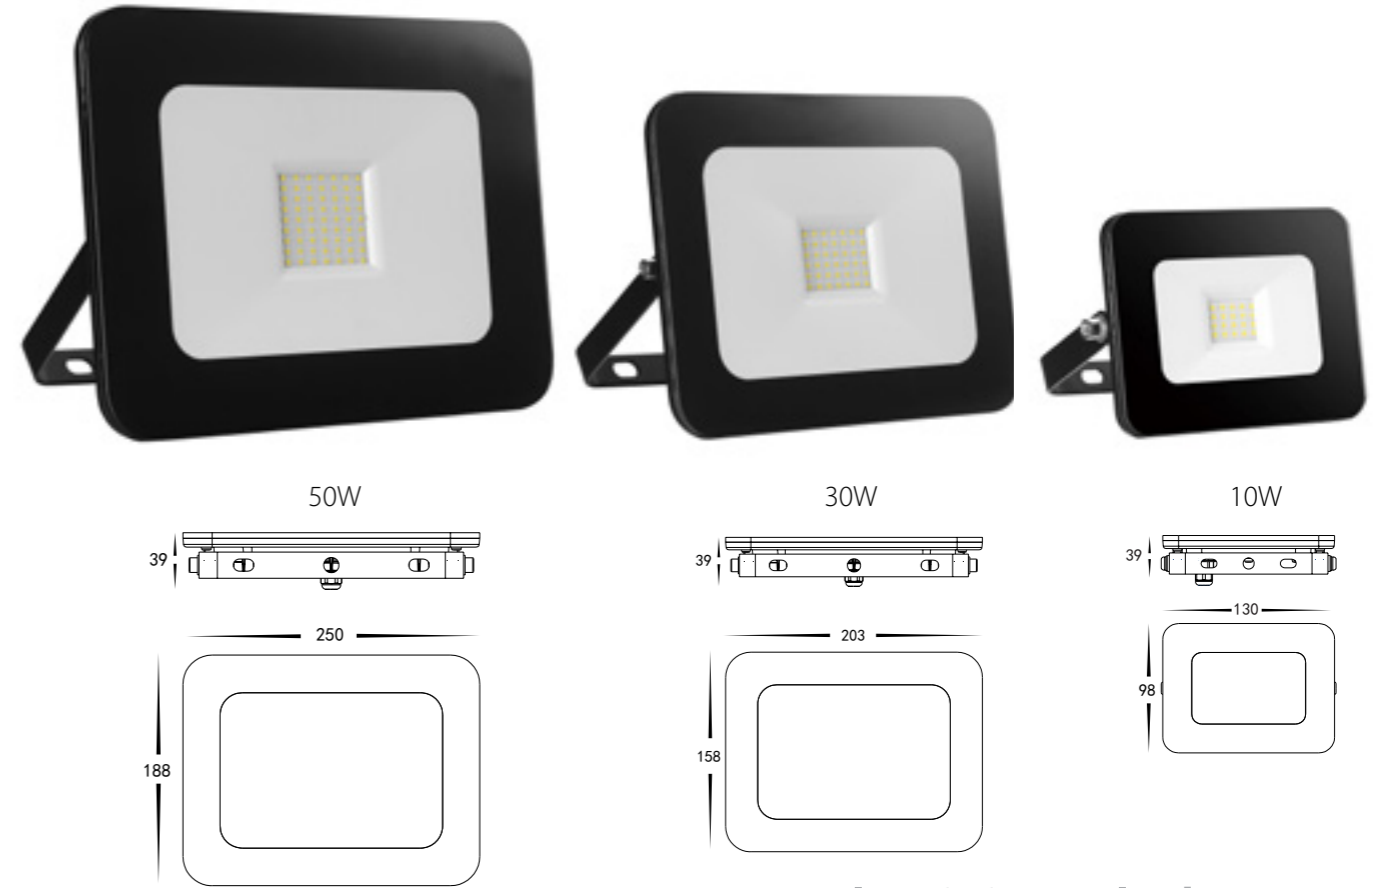

Aray Aluminium Black

- LED floodlight
- Aluminium Poly Powder Coated Black
- Supplied with flex and plug
- 180° beam angle
- IP Rating: IP65



| IMAGE | PART NUMBER | COLOUR TEMP | LUMENS | INPUT | INCLUDED LED |
|-------|----------------|-------------|--------|-------|------------------|
| | HV3726C | 4000k | 850lm | 240v | Built-in 10w SMD |
| IMAGE | PART NUMBER | COLOUR TEMP | LUMENS | INPUT | INCLUDED LED |
| | HV3728C | 4000k | 2550lm | 240v | Built-in 30w SMD |
| IMAGE | PART NUMBER | COLOUR TEMP | LUMENS | INPUT | INCLUDED LED |
| | HV3729C | 4000k | 4250lm | 240v | Built-in 50w SMD |

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336